

10Gig Termination System

For terminating Cat6E, Cat6A, Cat7 and larger industrial Ethernet cables.

Streaming media demands robust, dependable networks, including 10-Gig Cat6A shielded cable, to provide the necessary expanded bandwidth. However, these larger, shielded cables require special connectors and tools.

Our 10-Gig shielded connector and Tele-TitanXg crimp tool are specifically designed to terminate Cat6A cables. A pairing that assures you will achieve 10-Gig performance... a true **10Gig Termination System**.



Tele-TitanXg Crimp Tool
P/N 12515C



RJ45
Cat6A/10-Gig
shielded connector
P/N 106190

RJ45 Cat6A/10-Gig shielded connector:

- Max cable OD: 8.5mm/0.335"
- Max conductor OD: 1.35mm/0.053"
- Meets 10-Gig performance standard
- UL and RoHS compliant

Tele-TitanXg CriÜ Tool:

- Specifically made for terminating, P/N 106190
- Straight action vertical crimp force
- Minimal hand force for a perfect crimp

Application:

- Cat6E • 10-Gig Cat6A
- Cat7



Instructions




T568A / T568B Wiring Chart


Wire	1	2	3	4	5	6	7	8
T568A	W/G	G	W/O	B	W/B	O	W/B	B
T568B	W/O	O	W/G	B	W/B	G	W/B	B

- 1** Strip & remove 1" of your cable jacket with the Cyclops® 2 Cable Stripper (P/N 15010C). Remove cellophane and shield. Straighten the wires.

Use the chart above to determine whether you will be using the T568A or T568B configuration and organize wires accordingly.

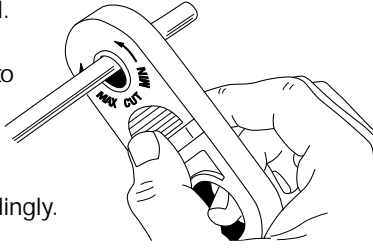


- 2** Line up your wires and make a clean cut across all 8 conductors and slide on the wire guide bar.

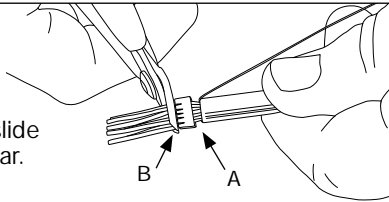

- (A) Slide bar down toward end of jacket and stop with 3/16" away from the end.
 (B) Flush cut across all 8 conductors at the front end of the bar.


- 3** Reshape the end of the cable using the CT-360 (P/N 12360), making it oval so it slides into the connector with ease.

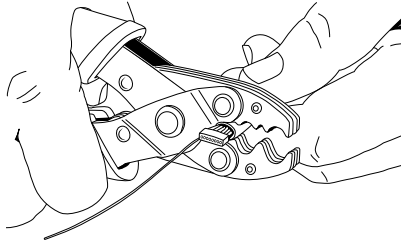


Your cable is ready to be inserted.

- 4** Carefully insert into backend of connector (A) and push all the way forward (B) until all 8 conductors are seated flush against the front end.


NOTE: DO NOT use a standard RJ45 crimp tool. This connector is designed with NO primary strain relief. Using a standard RJ45 crimp tool will crush the connector.

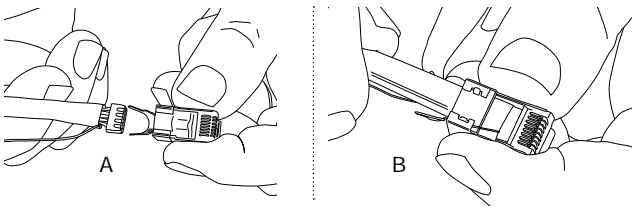


- 5** Insert the prepped connector into the proper cavity of the Tele-TitanXg (P/N 12515C) crimper. Squeeze handle to terminate.

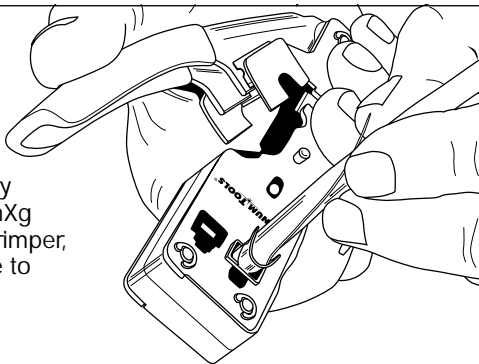

- 6** Roll up the drain wire and place in the base of the external ground. As you start to bring the external ground into place onto the cable, keep the mass of drain wire tucked in so it is totally covered.

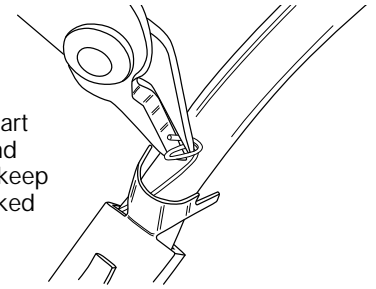

- 7** Bend down the external ground onto the cable jacket and push in the wing tips.

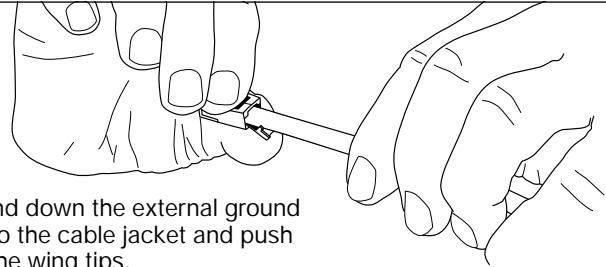


- 8** Large Cavity


Crimp the external ground using the CT-360.

Use the large or small tool cavity depending on the size of your cable.


NOTE: DO NOT over crimp the external ground.

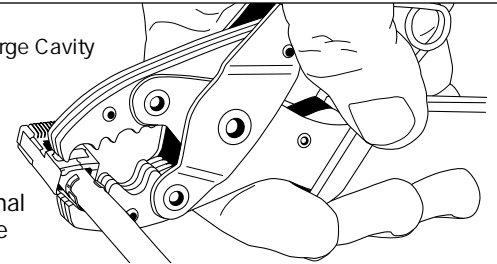

Small Cavity

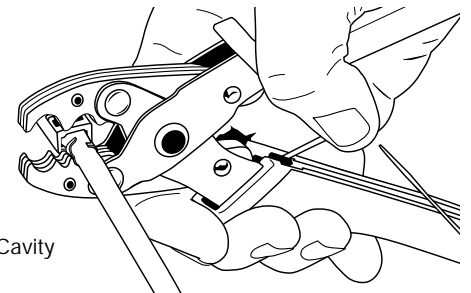

- 9** You are finished

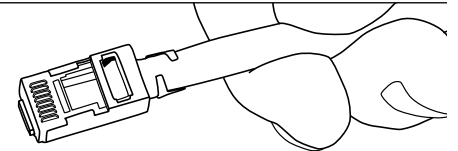

PLATINUM TOOLS®

Phone: 800.749.5783

Fax: 800.749.5784

California, USA

www.platinumtools.com

We Make Connections EZ!