
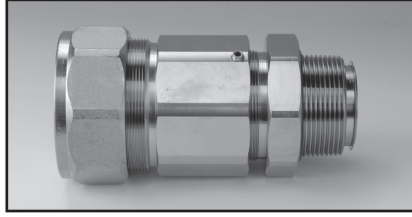


SERVICEDRIVE® SYSTEM SELECTION GUIDE

Armored Cable

Corresponding HP and Part Numbers

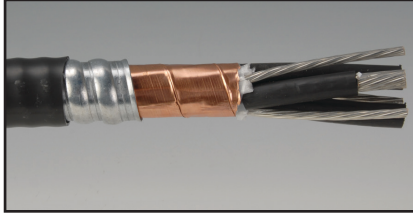

600 Volt Copper

CABLE Part Number	CONNECTOR Part Number	TERMINATION KIT Part Number	Size (AWG or Kcmil)	230V 3ø	460V 3ø	575V 3ø
VFDAP14/3	CONASD14/3	TERASD14-1/3	14	5 HP	10 HP	10 HP
VFDAP12/3	CONASD12/3	TERASD14-1/3	12	5 HP	10 HP	15 HP
VFDAP10/3	CONASD10/3	TERASD14-1/3	10	10 HP	20 HP	25 HP
VFDAP8/3	CONASD8/3	TERASD14-1/3	8	10 HP	30 HP	30 HP
VFDAP6/3	CONASD6/3	TERASD14-1/3	6	15 HP	40 HP	50 HP
VFDAP4/3	CONASD4/3	TERASD14-1/3	4	25 HP	50 HP	60 HP
VFDAP3/3	CONASD3/3	TERASD14-1/3	3	30 HP	60 HP	75 HP
VFDAP2/3	CONASD2/3	TERASD14-1/3	2	30 HP	60 HP	75 HP
VFDAP1/3	CONASD1/3	TERASD14-1/3	1	40 HP	75 HP	100 HP
VFDAP1/03	CONASD1/03	TERASD1/0-3/03	1/0	40 HP	75 HP	100 HP
VFDAP2/03	CONASD2/03	TERASD1/0-3/03	2/0	50 HP	100 HP	125 HP
VFDAP3/03	CONASD3/03	TERASD1/0-3/03	3/0	60 HP	125 HP	150 HP
VFDAP4/03	CONASD4/03	TERASD4/0-400/3	4/0	60 HP	150 HP	150 HP
VFDAP250/3	CONASD250/3	TERASD4/0-400/3	250	75 HP	150 HP	200 HP
VFDAP350/3	CONASD350/3	TERASD4/0-400/3	350	100 HP	200 HP	250 HP
VFDAP500/3	CONASD500/3	TERASD500-750/3	500	100 HP	250 HP	300 HP
VFDAP600/3	CONASD600/3	TERASD500-750/3	600	125 HP	250 HP	350 HP
VFDAP750/3	CONASD750/3	TERASD500-750/3	750	150 HP	300 HP	350 HP