

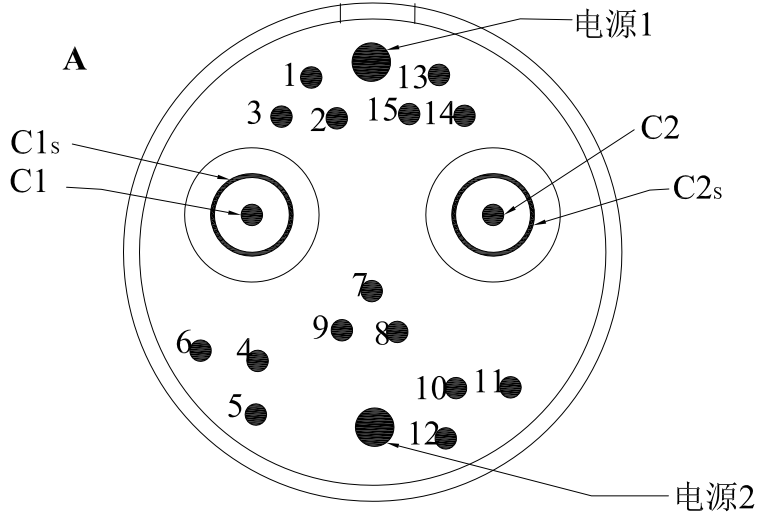


All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization of LEMO. 未经LEMO许可，不得擅自复制或发布

Contact numbering / 芯针排列
 From solder side / 从焊接端看

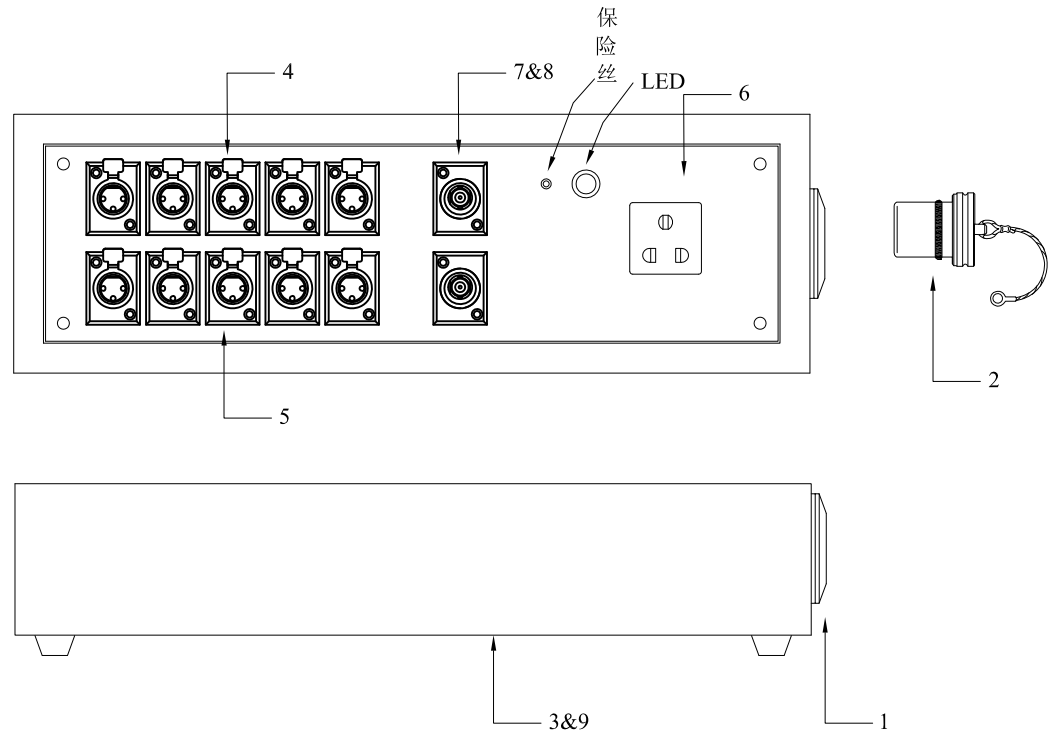

从盒子端面端看 (按编号焊接)

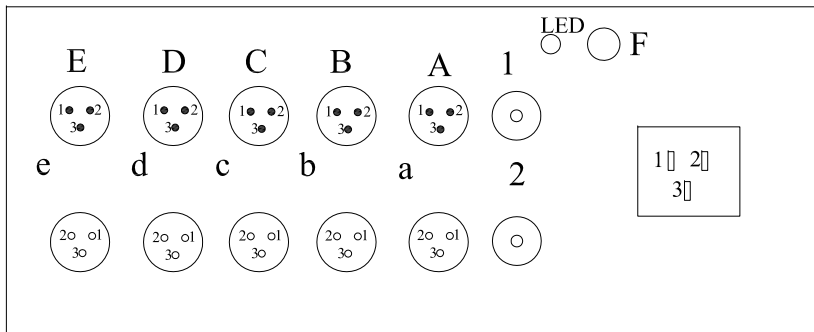

Item	Part No.	Qty	Description			
TITLE			SCALE	Draw.	Daniel	10-Jun-2014
广电转接盒			—	Appr.	Leo	10-Jun-2014
Cus. DWG: —				Rev.	1.0	10-Jun-2014
				HD-装配		
LEMO Electronics (Shanghai) Co., Ltd. Tel: (+86 21) 58997721 www.lemo-china.com			SHEET	DWG NO.		LM.BJ411
			1/2			

All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization of LEMO
未经LEMO许可，不得擅自复制或发布

Connection Designation / 接线表			
EGG. 5K. 877插座	芯线颜色		
C1	同轴1 芯	C1	BNC (1)
C1s	同轴1 网	C1s	
C2	同轴2 芯	C2	BNC (2)
C2s	同轴2 网	C2s	
1	黄	1	卡依头A&a
2	橙	2	
3	紫	3	
4	黄	1	卡依头B&b
5	橙	2	
6	紫	3	
7	黄	1	卡依头C&c
8	橙	2	
9	紫	3	
10	地线	1	卡依头D&d
11	蓝	2	
12	黑	3	
13	地线	1	卡依头E&e
14	绿	2	
15	黑	3	
电源1	黑+保险丝+电阻一脚+LED短脚 黑	1	三相电源插座
电源2	白+LED长针脚+电阻另一脚 白	2	
外壳	屏蔽网		

Requirement/技术要求:

- 1 装配参照混装K系列加工指导
- 2 LEMO标准线缆组件测试
- 3 LEMO线缆组件标准包装

9	LD.ZJH.FXG.5K	1	转接盒
8	LB.BNCMS.5009	2	BNC公头
7	LB.BCJ-JRUD	2	BNC双通
6	LB.UB-10A	1	电源模块
5	LB.NC3FDL-1	5	卡农头母头
4	LB.NC3MDL-1	5	卡农头公头
3	LC.PVN25.2222	0.5M	视频综合线缆
2	BRF.5K.200.NAS	1	LEMO 5K 防尘帽
1	EGG.5K.877.CLL5	1	LEMO 5K 固定式插座

Item	Part No.	Qty	Description
TITLE			SCALE
广电转接盒			—
Cus. DWG: —			Draw. Daniel 10-Jun-2014
			Appr. Leo 10-Jun-2014
			Rev. 1.0 10-Jun-2014
			HD-装配
SHEET 2/2			DWG NO. LM.BJ411

