



Long Outlet Shape, VG style


- Helashrink 130 Series, with rib, low profile

Features and Benefits


- Low profile and lightweight
- Typically used on airborne harnesses
- Rib locates on circular backshell



135-1-G as supplied / fully recovered.



a: Expanded form (supplied)

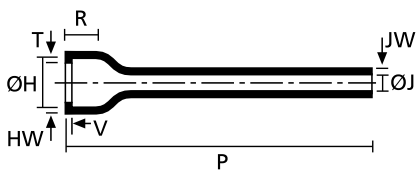

b: Fully recovered form (after heating)

For Material / Adhesive information please refer to page 200.

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW ± 20%	V ± 10%	T ± 10%	Designation as per VG-Norm	Article-No.
129-1-G	22.0	12.0	22.0	6.5	76.0	12.0	1.5	1.1	3.0	1.0	VG95343T06D001A	401-29180
130-1-G	25.5	15.0	25.5	7.5	83.0	12.0	1.5	1.1	3.0	1.0	VG95343T06D002A	401-30180
131-1-G	29.0	19.0	29.0	8.5	89.0	12.0	1.8	1.1	3.0	1.0	VG95343T06D003A	401-31180
132-1-G	34.0	23.0	34.0	10.0	102.0	12.0	1.8	1.1	3.0	1.0	VG95343T06D004A	401-32180
133-1-G	37.0	30.0	37.0	11.0	108.0	14.0	2.0	1.1	3.0	1.7	VG95343T06D005A	401-33180
134-1-G	43.5	34.0	43.5	12.0	114.0	15.0	2.0	1.1	3.0	1.7	VG95343T06D006A	401-34180
135-1-G	50.0	41.0	50.0	14.5	118.0	15.0	2.3	1.4	3.0	1.7	VG95343T06D007A	401-35180
136-1-G	62.5	47.0	62.5	18.0	121.0	16.0	2.5	1.4	3.0	2.0	VG95343T06D008A	401-36180
138-1-G	69.0	60.0	69.0	20.0	127.0	16.0	2.5	1.4	3.0	2.0	VG95343T06D009A	401-38180

All dimensions in mm. Subject to technical changes.

For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the moulded shapes catalogue.



Please note! Not all products listed on this page may have this approval. For product specific approvals please refer to the Appendix.