




DESC: 22/2 CM 105C AWM 2517 105C 300V GRAY		NWI P/N: FCM222-001	
SCALE: 25x	DATE: 5/7/08	DR. BY: KEN D	
CUSTOMER: IEWC		CUSTOMER PART NO. 2202C-8NW	

ITEM	SPECS.
A.	22 AWG 7X.0096TC CONCENTRIC OD .028±.001"
B.	9 MIL NOMINAL SR PVC INSULATION 7 MIL MINIMUM SR PVC INSULATION OD .048±.002"
C.	35 MIL NOMINAL TUBED PVC JACKET 28 MIL MINIMUM TUBED PVC JACKET COLOR GRAY
CABLE IS UL AND CSA APPROVED	
GE Spec 1005200P159	

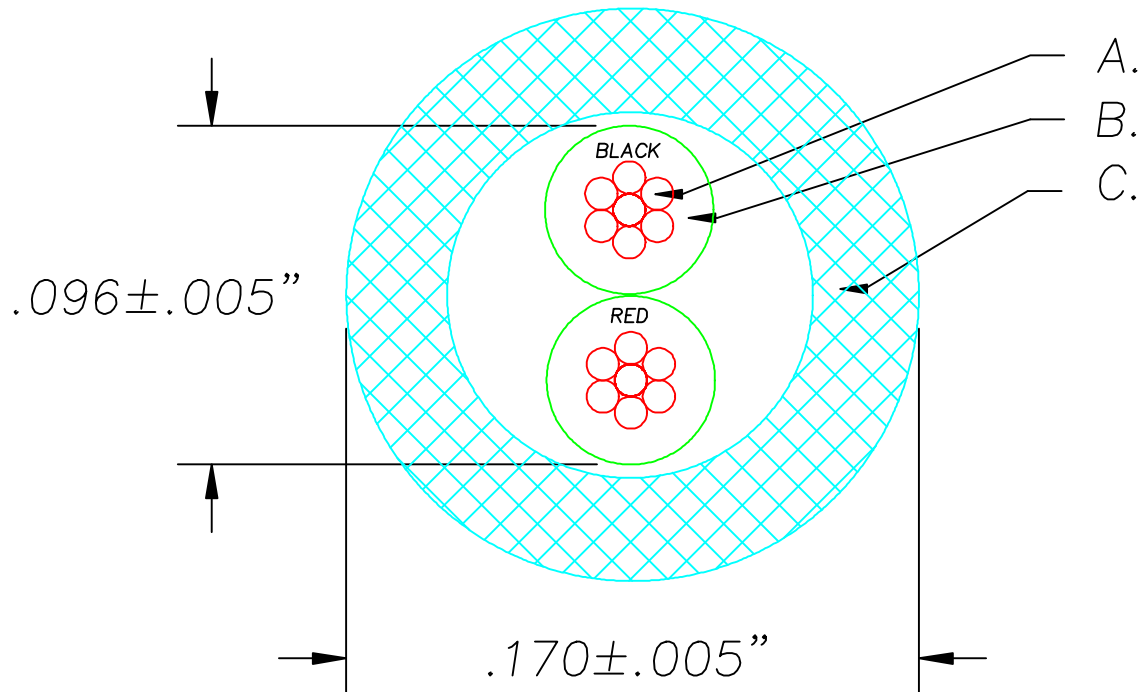

MECHANICAL REQUIREMENTS:
NONE

ELECTRICAL REQUIREMENTS:
NONE

DIMENSIONS FOR INTERNAL USE ONLY

BLACK INK PRINT LEGEND TO READ:
(UL) CM 22 AWG 105C E130317 OR AWM 105C 300V OR CSA AWM LL54185 I/II A/B 105C 300V FT4

INITIAL RELEASE	A	5/7/08	KAD	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL