




NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

DESC: 22/6 AWM 2517 105C 300V	DWG NO: TBD
SCALE: 25x	DATE: 10/31/06
CUSTOMER: JWC	DR. BY: KEN D
	CUSTOMER P/N: TBD
	NW P/N: TBD

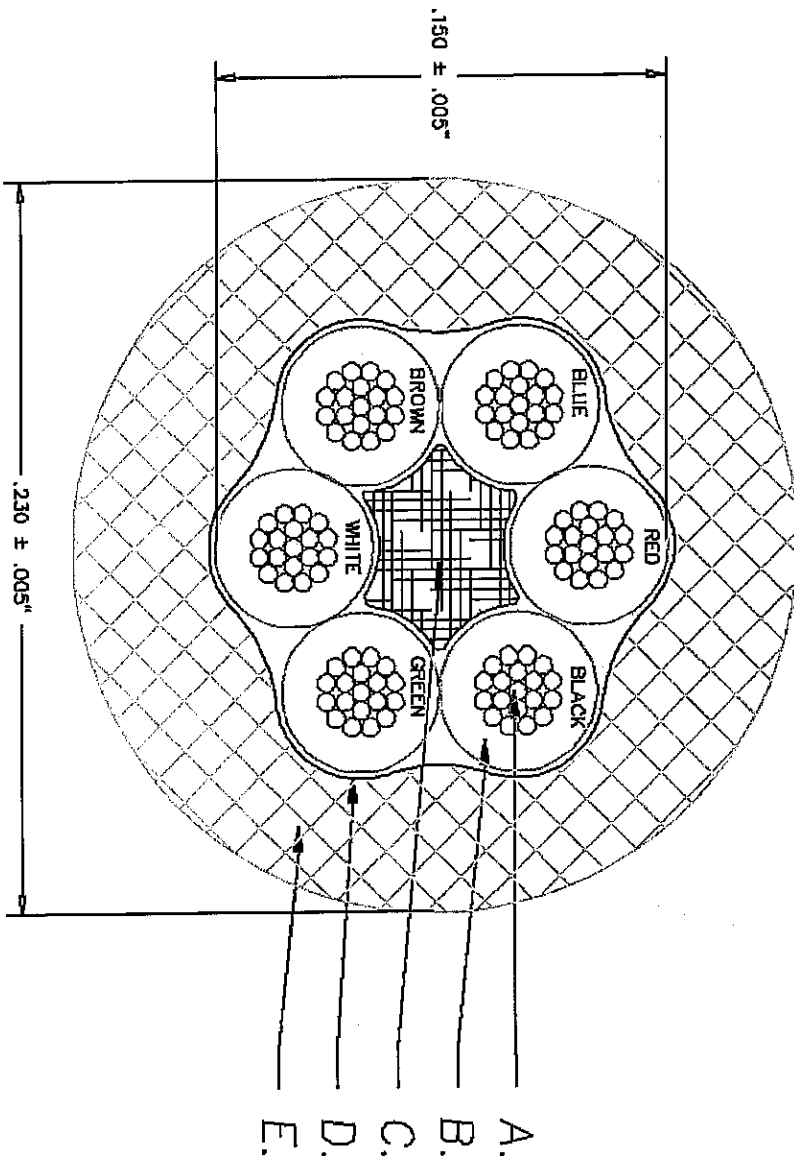

A.
B.
C.
D.
E.

ITEM	SPECS.
A.	22 GAUGE 19X.0058TC
B.	9 MILS PVC INSULATION 7 MILS MIN PVC INSULATION O.D. .050 ± .002" STYLE 1731
C.	POLY FILLER
D.	TISSUE PAPER SEPERATOR
E.	30 MILS PRESSURED PVC JACKET 24 MILS MIN PVC JACKET UL STYLE 2517 O.D. .230 ± .005" COLOR: BLACK
	CABLE IS RAHS COMPLIANT UL AND CSA APPROVED

ELECTRICAL REQUIREMENTS:
NONE SPECIFIED

MECHANICAL REQUIREMENTS:
NONE SPECIFIED

CORE DIMENSIONS FOR INTERNAL USE ONLY

REVISION RECORD	REV	REV DATE	APR 1	APR 2	QA R
	A	01/16/06	KD		

7716416