

ICONN PART 522-P6



Manufactured By:
 134 Ferry St.
 South Grafton, Ma 01560
 www.huesonwire.com

Issue Date: 2/12/2020

Issue: 1

Construction

Description: 5/C 22 19/34 BC PVC/TPU			Diam. (In)
Component:	5 Conductors		
Conductor:	22 AWG 19/34 Bare Copper to ASTM B-174		0.034"
Insulation:	0.01" Premium Grade PVC	0.054" +/- .003"	0.054"
Color Code:	Gray, Brown, White, Blue, Black		0.054"
Cable Assembly:	Bunch Cable 5 Conductors		0.145"
Fillers	Fibrillated polypropylene filler for roundness		0.145"
Binder:	Non-Woven Polyester Wrapping		0.150"
Jacket:	0.035" Polyurethane		0.220"
Jacket Color:	Yellow	0.220" +/- 0.010"	0.220"

Print: TBD

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>	
UL	AWM-21765	90°C	300	FT-1	
Canadian cRU	AWM	80°C	300	FT-1	I/II A/B

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2&3)
- REACH Regulation 201:
- California Prop 65:

IQ-20051

ok
 ASW
 2.18.20




Manufactured By:

Issue Date: 2/12/2020

Issue: 1

Drawing/Rotation:

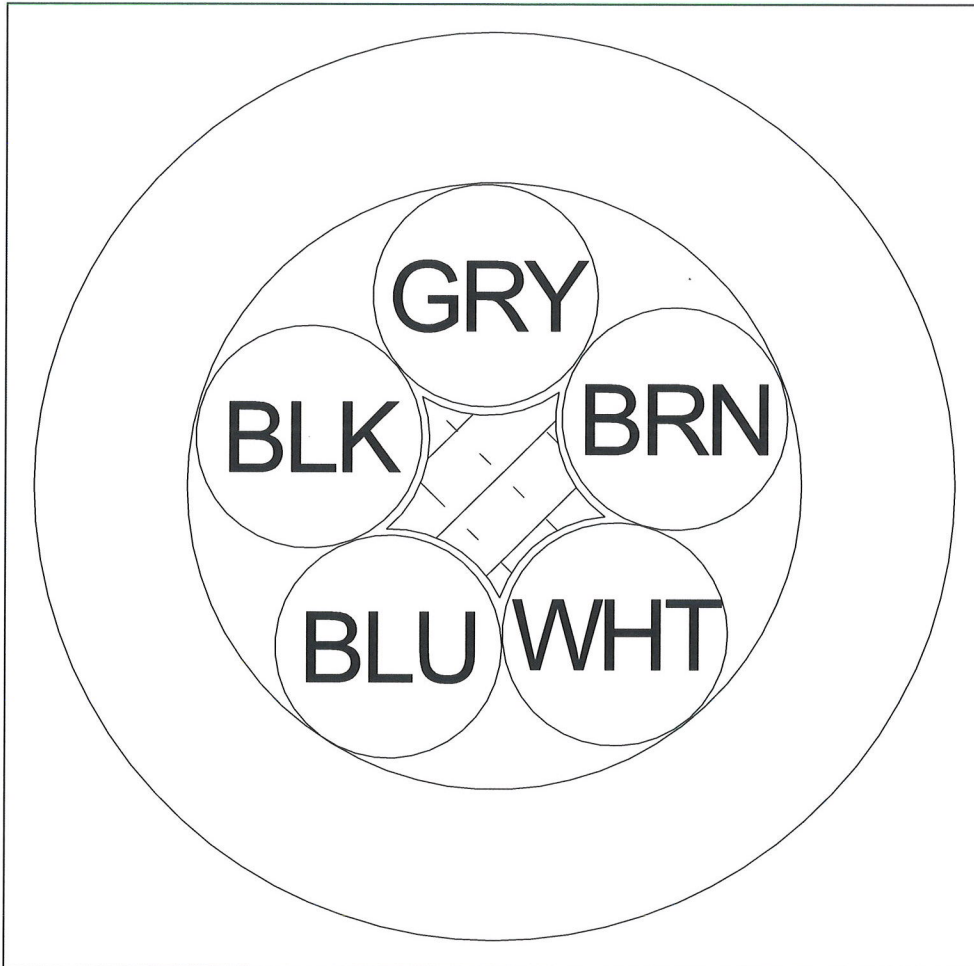

IQ-20051