


PN- 711855

CC2404NE0/04T-0

VOLEX RESERVES THE RIGHT TO ALTER NON-CRITICAL DIMENSIONS WITHOUT NOTICE.

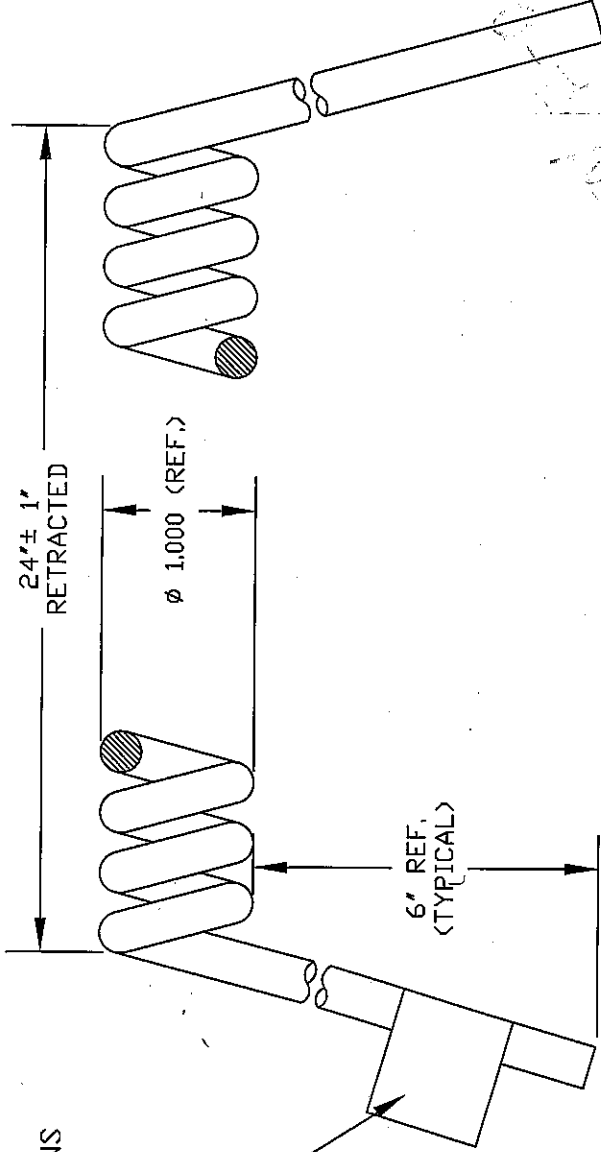

LABEL (SEE NOTE 8)

NOTES:

- 1) 4 CONDUCTORS TOTAL, 2 CONDUCTORS (WHITE & GREEN) OF 24 AWG CONSISTING OF 41 STRANDS OF 40AWG TINNED COPPER, SHIELDED.
- 2) CONDUCTORS (BLACK & RED) OF 23AWG CONSISTING OF 21 STRANDS OF 36AWG TINNED COPPER STRANDING.
- 3) CONDUCTOR INSULATION MATERIAL: RUBBER
- 4) CONDUCTOR COLORS: BLACK, WHITE, RED, & GREEN.
- 5) JACKET INSULATION MATERIAL: NEOPRENE
- 6) EXTENDED LENGTH APPROX 5 FT.
- 6.5) RATING: 60°C / 75 VOLTS MAX.
- 7) APPROVALS: NONE
- 8) CORDAGE O.D. : .270" (REF.)
- 9) CORD SET LABEL WILL HAVE VOLEX LOGO AND PART NUMBER.
- 10) PRODUCT IS ROHS & PROP 65 COMPLIANT
- 11) 50 PIECES PER CARTON
- 12) ALL DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.

3	ADDED EXTENED LENGTH OF 5 FT	11/26/07
2	CHGD CARTON QTY FROM 60 PCS	11/26/07
1	FIRST ISSUE	8/16/07
REV	DESCRIPTION	DATE
SCALE:	ECON:	ITEM DESCRIPTION
NOT TO SCALE	N/A	23/5 RETRACTILE CORD SET
TOLERANCE UNLESS OTHERWISE SPECIFIED		APPROVED
.XXX ± .005		STC
.XX ± .02		DRAWN BY
.X ± .03		STC
ANGULAR ± 1/2°		PART NO.
		6491

- Indianapolis, IN
 Conover, N.C.
 Fremont, CA
 Aguascalientes, MX
 Tijuana, Mexico
 Hermosillo, MX
 Clinton, AR
 Kanata, Canada



Proprietary Notice:
 This document is the property of Volex Incorporated. The information contained herein is not to be disclosed to anyone without the express written consent of Volex Inc.

FINISH: JACKET: SMOOTH