


EG 299-S

BICC BRAND-REX COMPANY
T-14126(8/16)
EIGHT CONDUCTOR PENDANT CABLE

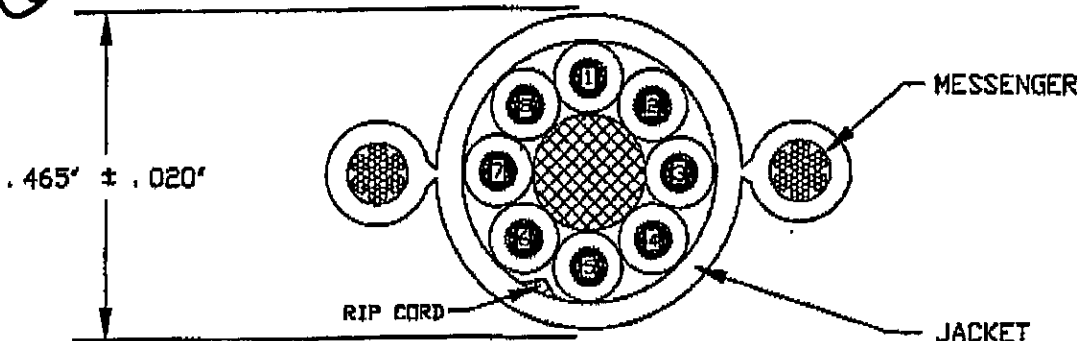

- COMPONENT I - CONDUCTOR: #16AWG 65/34 BARE COPPER
 (ITEMS 1-8) INSULATION: PVC-.015" NOMINAL WALL
 SHEATH: NYLON (CLEAR) -.005" NOM. WALL
 DIAMETER: .102" NOMINAL
- COMPONENT II - GALVANIZED STEEL MESSENGER-1/16" 7X7
 (ITEMS 9-10) DIAMETER: .065" NOMINAL
 SHEATH: NYLON (CLEAR) -.010" NOM. WALL
 DIAMETER: .065" NOMINAL
- FILLERS - AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION
- CABLE - CORE: (1) FILLER PULLED IN
 LAYER I: (8) COMPONENT I (ITEMS 1-8) CABLED
 AROUND CORE WITH A L. H. LAY
- BINDER - .002" MYLAR TAPE-25% MINIMUM OVERLAP
- JACKET - PVC (YELLOW)-.047" NOMINAL WALL-TWO (2) STEEL MESSENGERS
 (ITEMS 9-10) & ONE RIP CORD PULLED IN AT JACKETING
- DIAMETER - .465' ± .020'
- NET CABLE WGT. - 196 LBS. /1000'
- UL - PENDANT CABLE 90°C 600V
- JACKET PRINT- 'E-24573 T-14126(8/16) 90C 600V PENDANT
 CABLE 8/C 16AWG OUTDOOR USE (UL)'

COLOR CODE -	ITEM NUMBER	COLOR	PRINT
	1	BLACK	1 ONE
	2	RED	2 TWO
	3	BLUE	3 THREE
	4	ORANGE	4 FOUR
	5	YELLOW	5 FIVE
	6	BROWN	6 SIX
	7	RED/BLACK	7 SEVEN
	8	GREEN	N/A

REVISIONS	0	02/06/96	FIRST ISSUE	BICC BRAND-REX COMPANY 1600 West Main Street, Wallingford, CT 06226-1128 <u>Leadership Through Cable Technology</u>
	A	10/02/98	UPDATE DRAWING	
	B	04/15/99	ADD PRINTED NUMBERS	
				DRAWING NO: H265
REFERENCES	INDUSTRIAL ELECTRIC			DRAWN BY: M. LAJEUNESSE APPROVED BY: <i>[Signature]</i> THIS DRAWING IS THE PROPERTY OF THE BICC BRAND-REX COMPANY AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF THE BICC BRAND-REX COMPANY
	ELECTROMOTIVE PART #004-5014			
	BICC BRAND-REX #T-14126(8/16)			