


SKINTOP® MS-NPT/MSR-NPT

Nickel-Plated Brass Strain Relief with NPT Thread

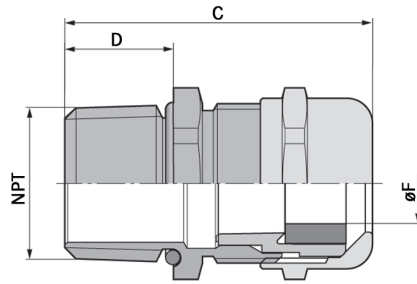

Similar Products

- SKINTOP® MS-SC-NPT

Complete the Installation

SKINTOP® DIX
Bushing: page 548

Plugs: page 550

SKINTOP® MS-NPT/MSR-NPT is a superior quality, liquid-tight, metallic cable gland intended for applications where ruggedness and durability are required. These cable glands are suitable for a wide range of applications, from manufacturing machinery to measurement and control equipment, including automation and robotics.

Application Advantage

- Suitable for use in areas with high demands on mechanical and chemical stability
- The heavy duty SKINTOP® design provides great pull-out strength and very reliable strain relief
- Extended temperature range due to the nickel-plated brass body
- Generous high-quality neoprene bushing and perbunan O-ring provide a liquid-tight and dust-proof hermetic seal

Approvals



Technical Data

Material:	Nickel-plated brass	Temperature Range:	-40°C to +100°C
- Body:	Nickel-plated brass	- Static:	-40°C to +100°C
- Insert:	Polyamide	- Dynamic:	-25°C to +100°C
- Bushing:	CR		
- O-ring:	NBR	IP Protection:	IP68, 5 bar
			(Exceeds NEMA 6/6P pressure rating)
Locknuts:	Add NPT metal locknuts, page 545		

Part Number	Thread Type & Size	øF Clamping Range (inches) (mm)		SW Wrenching Flats (inches)	C Overall Length (inches)	D Thread Length (inches)	Standard Pack Size
SKINTOP® MS-NPT: Standard							
53112004	NPT ¼"	0.137 - 0.275	3.5 - 7.0	0.630	1.418	0.591	100
53112014	NPT ⅜"	0.177 - 0.394	4.5 - 10.0	0.788	1.564	0.591	100
53112024	NPT ½"	0.275 - 0.512	7.0 - 13.0	0.945	1.674	0.591	50
53112034	NPT ¾"	0.354 - 0.669	9.0 - 17.0	1.142	1.753	0.591	25
53112044	NPT 1"	0.433 - 0.827	11.0 - 21.0	1.418	1.930	0.591	25
53112054	NPT 1¼"	0.748 - 1.103	19.0 - 28.0	1.773	2.265	0.669	10
53112064	NPT 1½"	1.063 - 1.379	27.0 - 35.0	2.127	2.423	0.669	5
53112074	NPT 2"	1.339 - 1.773	34.0 - 45.0	2.639	2.501	0.669	5
SKINTOP® MSR-NPT: Reducer Bushing							
53112006	NPT ¼"	0.039 - 0.197	1.0 - 5.0	0.630	1.418	0.591	10
53112016	NPT ⅜"	0.078 - 0.275	2.0 - 7.0	0.788	1.564	0.591	100
53112026	NPT ½"	0.197 - 0.394	5.0 - 10.0	0.945	1.674	0.591	50
53112036	NPT ¾"	0.236 - 0.512	6.0 - 13.0	1.142	1.753	0.591	25
53112046	NPT 1"	0.275 - 0.591	7.0 - 15.0	1.418	1.930	0.591	25
53112056	NPT 1¼"	0.591 - 0.906	15.0 - 23.0	1.773	2.265	0.669	10
53112066	NPT 1½"	0.866 - 1.142	22.0 - 29.0	2.127	2.423	0.669	5
53112076	NPT 2"	1.103 - 1.536	28.0 - 39.0	2.639	2.501	0.669	5

Photographs are not to scale and are not true representations of the products in question. For current information go to our website. If not otherwise specified, all values relating to the product are nominal values.