


PART NUMBER	CONDUCTOR QUANTITY	CONDUCTOR / COLOR	WIRE DIAMETER
3542620	2	1-16 GAGE BLACK 1-16 GAGE RED	.256± .003
3542630	3	1-16 GAGE BLACK 1-16 GAGE RED 1-16 GAGE BLUE	.270± .003
3542640	4	1-16 GAGE BLACK 1-16 GAGE RED 1-16 GAGE GREEN 1-16 GAGE WHITE	.310± .003
3542670	5	1-16 GAGE BLACK 1-16 GAGE RED 1-16 GAGE GREEN 1-16 GAGE WHITE 1-16 GAGE BLUE	.348± .003

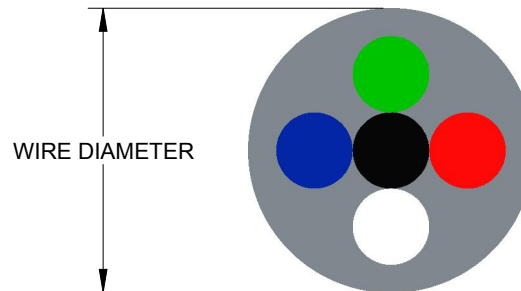

**GXL WIRE MATERIAL:**

CONDUCTORS: 16 GAGE 26 STRAND TINNED COPPER .103 O.D. WITH .023 WALL  
 OUTER JACKET: GRAY PVC SOFT JACKET PRESSURE EXTRUDED  
 OUT OF ROUNDNESS REQUIREMENT: NO MORE THAT 20% OF THE THICKNESS OF THE INSULATION..

WIRE MUST MEET SAE SPECIFICATION J1128

SUPPLIER SHALL BULK PACKAGE IN A BOX AND LABEL PER  
 VELVAC SPECIFICATION #EIP00001.

<b>REVISIONS</b>		<b>TOLERANCES</b>		<b>PRO</b>		<b>REV:</b> 01
PROJECT #3472 AND #3477		2 DECIMAL ±0.01 3 DECIMAL ± .005 ANGULAR ±0.5 *UNLESS OTHERWISE SPECIFIED*				
01	05-21-12 MS	<b>PROPRIETARY</b>		DATE: 05-21-12	SHEET 1 OF 1	
		THIS CONCEPT & DRAWING IS THE PROPERTY OF VELVAC INC. AND SHALL NOT BE REPRODUCED, COPIED, DISCLOSED OR USED FOR THE MANUFACTURE OR PROCUREMENT FROM SOURCES OTHER THAN VELVAC INC., WITHOUT WRITTEN PERMISSION FROM VELVAC, INC.		16 GAGE GXL GRAY JACKETED ROUND WIRE		DRAWING NUMBER: <b>*3542620</b>