


GeneralCable

THREE CONDUCTOR 22AWG SHIELDED CABLE

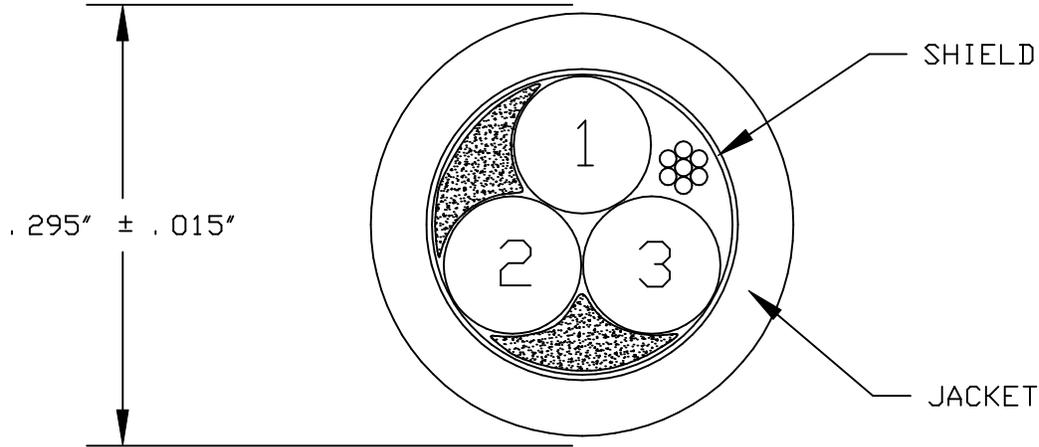

COMPONENT I-
(ITEMS 1-3)

CONDUCTOR: 22AWG 19/34 TINNED COPPER
INSULATION: XLPE-.031" NOMINAL WALL
DIAMETER: .092" NOMINAL

FILLERS-

AS REQUIRED TO MAINTAIN A CIRCULAR CABLE CROSS-SECTION

DRAIN WIRE-

20AWG 7/28 TINNED COPPER

CABLE-

CORE: THREE (3) COMPONENT I (ITEMS 1-3) + DRAIN WIRE +
FILLERS CABLED TOGETHER WITH A L. H. LAY

SHIELD-

.0015" ALUMINUM/MYLAR TAPE -25% MIN OVERLAP

JACKET-

XLPE (GRAY)-.047" NOMINAL WALL

DIAMETER-

.295" NOMINAL

UL-

AWM STYLE 4313 125°C 600V

CSA-

AWM IIA 125°C 600V

NET CABLE WEIGHT-

49 LBS/1000'

JACKET PRINT-

"68A9385P322 GENERAL CABLE BRAND REX BRAND (WC) RJ AWM STYLE
4313/CSA AWM IIA 600V XLPE FTI/ROHS COMPLIANT DAY/MONTH/YEAR"

COLOR CODE-

| ITEM NUMBER | COLOR |
|-------------|-------|
| 1 | BLACK |
| 2 | WHITE |
| 3 | RED |

| | | | | | |
|------------|-------------------------|----------|-------------|--|----------------------------|
| REVISIONS | 0 | 02/23/10 | FIRST ISSUE | <h3>GeneralCable</h3> <p>1600 West Main Street, Willimantic, CT 06226-1128</p> <p><u>The Power of One</u></p> | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| REFERENCES | GE P/N 68A9385P322GY | | | DRAWN BY: CAD | APPROVED BY: M. LAJEUNESSE |
| | GeneralCable P/N 391910 | | | | |
| | T-14695 (3/22) | | | THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable | |
| | | | | | |