

Polypropylene Fillers as required to fill voids

Binder tape: .008" SBR/Cotton - 25% Nom. Lap

.125" Nominal Black reinforced Heavy Duty Neoprene Jacket.

Nominal Diameter: 1.670"

Nominal Weight: 2100lbs/1000ft

PRINT LEGEND:

GENERAL CABLE® (WC) (UL) 400HZ OUTDOOR AIRCRAFT
GROUND SUPPORT CABLE 90C DRY 75C WET 600V RATED AT
260 AMPS DAY/MONTH/YEAR PLUS SEQUENTIAL FOOTAGE MARK


Dimensions are Nominal and Subject to Normal Manufacturing Tolerances

(3)#6Awg 665/#34 soft bare copper
Class M.
Insulation: .045" Ethylene Propylene
Rubber
Nominal Diameter: .308"

(6)#4Awg 1064/#34 soft bare copper
Class M.
Insulation: .045" Ethylene Propylene
Rubber
Nominal Diameter: .365"

Control Triads: #18Awg 41/#34 soft
bare copper Class M.
Insulation: .015"/.005" Pvc/Nylon
Triplexed

Nominal Diameter: .185"

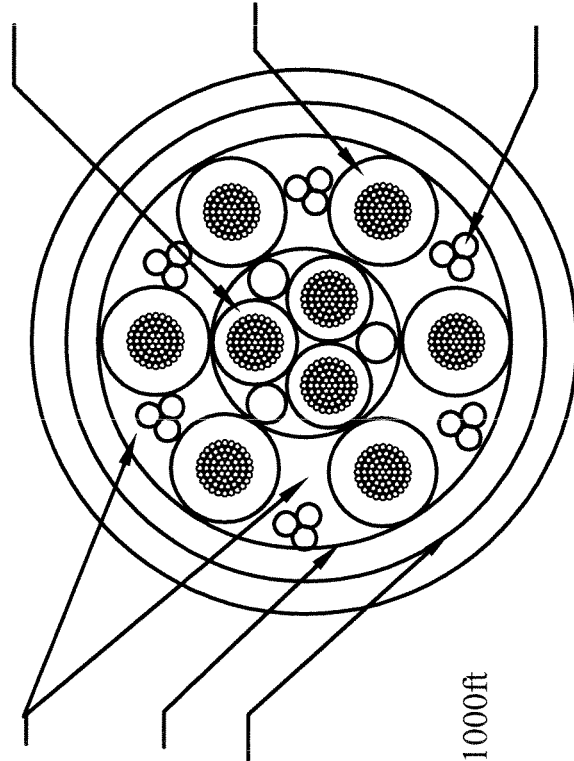

GROUND POWER SUPPORT

600V 260 AMP

PART NUMBER
389790



Drawn By: CAD

Date: 8/04/2010, Rev.3

Approved By: HOW

Drawing No. H-637