


DGC DATA GUIDE CABLE

SPECIALTY & CUSTOM CABLES

232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataquidecable.com

4 CONDUCTOR 8 AWG 105C 600V CABLE

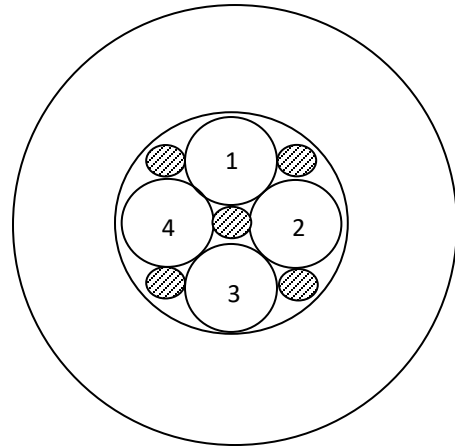

CONDUCTORS

(4 TOTAL):

- 8 AWG 413 Strands 34 AWG Tinned Annealed Copper

DIELECTRIC:

- .035" Nominal Wall Thickness PVC to a Diameter of .232"

COLOR CODE:

- As Indicated


CABLE ASSEMBLY:

- Lay Length: 9-1/2" Nominal Left Hand Direction
- Filler: Fibrillated Polypropylene ITO to Maintain Roundness
- Binder: .001" Thickness Polyester Binder Tape

JACKET:

- Material: Thermoplastic PVC
- Color: Black
- Wall Thickness: .050" Nominal
- Finished Cable Diameter: .662" Nominal (.720" Absolute Max)

MANUFACTURER'S IDENTIFICATION:

- Type: Surface Printed in White Ink on Jacket Surface:
- Legend: "E90298  AWM STYLE 2586 105C 600 VOLTS VW-1"

COLOR CODE

CONDUCTOR	COLOR
1	RED
2	WHITE
3	BLACK
4	GREEN

LISTINGS/AGENCY APPROVAL

- UL AWM 2586 105C 600VOLTS
- RoHS

REVISION HISTORY

0	8/11/99	WJD	INITIAL RELEASE
1	4/20/00	WJD	ADD P/N; REDUCE PRIME WALL
2	5/19/00	WJD	MODIFY STRAND AND LEGEND
3	6/2/00	WJD	CHANGE STRANDING
4	9/12/18	WJD	REFORMAT-RERELEASE

Customer Number	
D.G. Part Number	00D14-4
Prepared By: LLJ	
Reviewed By: WJD	