



2-Way Outlet Shapes, VG style

- Helashrink 200 Series

Features and Benefits


- Mechanical tension relief in cable harnesses



Two-way outlet shape 223-2 supplied / fully recovered.



a: Expanded form (supplied)

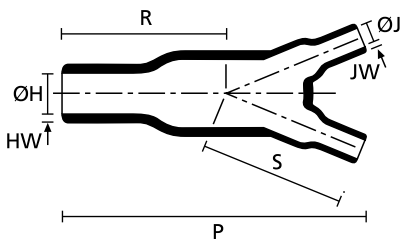

b: Fully recovered form (after heating)

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	HW ± 20%	JW nom.	S nom	Designation as per VG-Norm	Article-No.
206-1-G	13.0	6.0	7.0	3.0	22.0	19.0	1.5	1.0	19.0	VG95343T08C001A	402-06180
212-1-G	14.5	8.0	8.5	5.5	82.6	83.0	2.3	2.0	63.0	VG95343T08C005A	402-12180
213-1-G	17.3	7.9	11.1	7.9	140.0	83.1	2.3	1.0	64.0	-	402-13180
203-1-G	27.0	12.0	13.0	6.0	39.0	43.0	2.5	1.5	43.0	VG95343T08C002A	402-03180
204-1-G	39.0	18.0	27.0	12.0	66.0	81.0	3.1	2.0	81.0	VG95343T08C003A	402-04180

All dimensions in mm. Subject to technical changes.

For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the moulded shapes catalogue.



Please note! Not all products listed on this page may have this approval. For product specific approvals please refer to the Appendix.