

Bottle Shapes, VG style


- Helashrink 150 Series, with rib

Features and Benefits


- Use in conjunction with circular grooved adaptor
- For strain relief and environmental sealing



150 Series boot recovered onto a connector.



a: Expanded form (supplied)

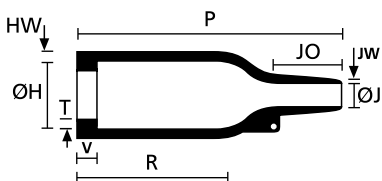

b: Fully recovered form (after heating)



150 Series supplied.

TYPE	ØH min. a	ØH max. b	ØJ min. a	ØJ max. b	P ± 10%	R ± 10%	JO ± 10%	HW ± 20%	JW ± 20%	V ± 10%	T ± 20%	Designation as per VG-Norm	Article-No.
152-41-G	24.0	10.5	24.0	6.0	26.0	9.0	10.0	1.6	0.5	3.0	1.0	VG 95343 T06 A 001 A	401-52780
152-42-G	24.0	10.5	24.0	6.0	38.0	21.0	10.0	1.6	0.5	3.0	1.0	VG 95343 T06 B 001 A	401-52880
153-41-G	25.0	14.0	9.0	3.5	40.0	13.0	16.0	1.8	0.5	3.0	1.0	VG 95343 T06 A 002 A	401-53780
153-42-G	25.0	14.0	9.0	3.5	55.0	28.0	16.0	1.8	0.5	3.0	1.0	VG 95343 T06 B 002 A	401-53880
154-41-G	30.0	14.0	30.0	6.0	43.0	20.0	13.0	1.8	1.0	3.0	1.0	VG 95343 T06 A 003 A	401-54780
154-42-G	30.0	14.0	30.0	6.0	55.0	32.0	13.0	1.8	1.0	3.0	1.0	VG 95343 T06 B 003 A	401-54880
155-41-G	31.0	18.0	31.0	7.0	47.0	15.0	18.0	1.8	1.0	3.0	1.0	VG 95343 T06 A 004 A	401-55780
155-42-G	31.0	18.0	31.0	7.0	67.0	35.0	18.0	1.8	1.0	3.0	1.0	VG 95343 T06 B 004 A	401-55880
156-41-G	36.0	22.5	36.0	8.5	60.0	22.0	20.0	2.0	1.0	3.0	1.0	VG 95343 T06 A 005 A	401-56780
156-42-G	36.0	22.5	36.0	8.5	80.0	42.0	20.0	2.0	1.0	3.0	1.0	VG 95343 T06 B 005 A	401-56880
157-41-G	43.0	28.0	43.0	10.0	60.0	21.0	20.0	2.2	1.0	3.0	1.7	VG 95343 T06 A 006 A	401-57780
157-42-G	43.0	28.0	43.0	10.0	79.0	41.0	20.0	2.2	1.0	3.0	1.7	VG 95343 T06 B 006 A	401-57880
157-43-G	43.0	28.0	43.0	10.0	99.0	61.0	20.0	2.2	1.0	3.0	1.7	VG 95343 T06 C 001 A	401-57980
158-41-G	60.0	35.0	60.0	16.0	90.0	32.0	38.0	3.2	1.5	3.0	1.7	VG 95343 T06 A 007 A	401-58780
158-42-G	60.0	35.0	60.0	16.0	110.0	52.0	38.0	3.2	1.5	3.0	1.7	VG 95343 T06 B 007 A	401-58880
158-43-G	60.0	35.0	60.0	16.0	130.0	72.0	38.0	3.2	1.5	3.0	1.7	VG 95343 T06 C 002 A	401-58980
159-41-G	66.0	45.0	66.0	17.0	130.0	50.0	50.0	3.8	2.0	3.0	2.0	VG 95343 T06 A 008 A	401-59780
159-42-G	66.0	45.0	66.0	17.0	150.0	70.0	50.0	3.8	2.0	3.0	2.0	VG 95343 T06 B 008 A	401-59880
159-43-G	66.0	45.0	66.0	17.0	171.0	90.0	50.0	3.8	2.0	3.0	2.0	VG 95343 T06 C 003 A	401-59980
160-41-G	82.0	58.0	82.0	27.0	137.0	37.0	62.0	3.8	3.8	3.0	2.0	VG 95343 T06 A 009 A	401-60780
160-42-G	82.0	58.0	82.0	27.0	158.0	58.0	62.0	3.8	3.8	3.0	2.0	VG 95343 T06 B 009 A	401-60880
160-43-G	82.0	58.0	82.0	27.0	213.0	113.0	62.0	3.8	3.8	3.0	2.0	VG 95343 T06 C 004 A	401-60980

All dimensions in mm. Subject to technical changes.

For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the moulded shapes catalogue.



Please note! Not all products listed on this page may have this approval. For product specific approvals please refer to the Appendix.