



### 2-Piece Fixing Ties with Fir Tree, with Disc, for Round Holes

Primarily designed for fixing cable harnesses in the automotive industry, their simplicity and ease of use has resulted in these parts being used in other industries, for example aviation, switch gear manufacturer, white goods manufacturer.


#### Features and Benefits

- Pre-assembled 2-piece fixing tie with fir tree foot part
- Cable tie head can be moved after bundling
- Easy to assemble without the need for a tool
- Disc adjusts tie for pressure from various directions and minimises access of dust, dirt and water
- Fir tree foot part can be used for a variety of panel thicknesses
- Suitable for use within threaded holes




These Fir Tree fixings can also be used in threaded, blind holes.

#### Fir Tree Parts FT5

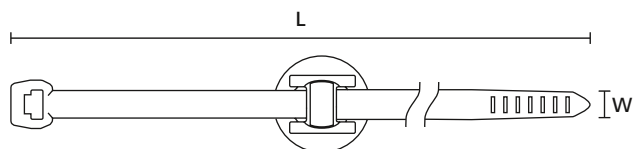


T50SOSFT5SD

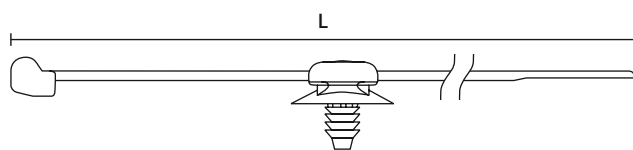


T50SOSFT5SD

**i** Other dimensions are available on request.

**d** Material specification please see page 24.



T30RFT5




T50SOSFT5SD

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material Cable Tie	Material Foot Part	Colour	Tools	Article-No.
T18RFT5	2.5	100.0	20.0	80	16.0	4.5 - 5.0	0.7 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2;4-6	156-01225
T30RFT5	3.5	150.0	34.0	135	16.0	4.5 - 5.0	0.7 - 3.0	PA46	PA46	Natural (NA), Grey (GY)	2;4-6	150-55948
	3.5	150.0	34.0	135	16.0	4.5 - 5.0	0.7 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2;4-6	150-55850
	3.5	150.0	34.0	135	16.0	4.5 - 5.0	0.7 - 3.0	PA46	PA46	Natural (NA), Grey (GY)	2;4-6	156-01191
	3.5	150.0	34.0	135	16.0	4.5 - 5.0	0.7 - 3.0	PA46	PA46	Grey (GY)	2;4-6	156-01316
T50SOSFT5	4.6	150.0	31.0	225	16.0	4.5 - 5.0	0.7 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2-10	156-06200
T50SOSFT5SD	4.6	150.0	35.0	225	16.0	4.5 - 5.0	0.7 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2-10	156-00432
T50RFT5	4.6	200.0	45.0	225	16.0	4.5 - 5.0	0.7 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2-10	156-00025

All dimensions in mm. Subject to technical changes.


Recommended Tools									
2	3	4	5	6	7	8	9	10	
MK20	MK21	MK3SP	MK3PNSP2	EVO7	MK7HT	MK7P	MK6	MK9	

For more information on toolings please refer to the Application Tooling chapter.




### 2-Piece Fixing Ties with Fir Tree, with Disc, for Round Holes

#### Fir Tree Parts FT6

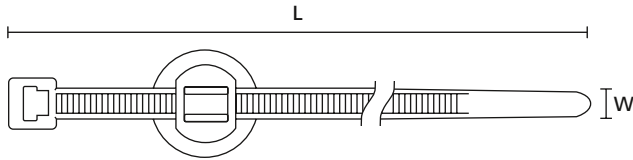

T50RFT6LG

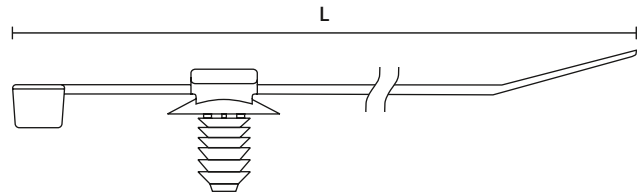

T50RFT6LG

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material Cable Tie	Material Foot Part	Colour	Tools	Article-No.
T18RFT6	2.5	100.0	20.0	80	16.0	6.5 - 7.0	0.8 - 3.0	PA66	PA66	Black (BK)	2;4-6	150-09110
PT2AFT6LG	3.4	145.0	35.0	230	16.0	6.4 - 7.1	0.8 - 6.0	PEEK	PA46	Beige (BGE), Grey (GY)	2;4-6	156-01336
T30RFT6	3.5	150.0	34.0	135	16.0	6.4 - 7.1	0.8 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2;4-6	150-77950
T30RFT6LG	3.5	150.0	35.0	133	16.0	6.4 - 7.1	0.8 - 6.0	PA66HS	PA66HIRHS	Black (BK)	2;4-6	150-31090
T30RFT6SD	3.6	148.0	35.0	135	16.0	6.4 - 7.1	0.8 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2;4-6	150-52690
T50SFT6LG1SD	4.6	160.0	30.0	225	16.0	6.5 - 7.0	0.6 - 6.0	PA66HS	PA66HIRHS	Black (BK)	2-10	156-00154
T50ROSFT6	4.6	200.0	45.0	225	16.0	6.4 - 7.1	0.8 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2-10	156-00076
T50ROSFT6SD	4.6	200.0	45.0	225	16.0	6.4 - 7.1	0.8 - 3.0	PA46	PA46	Grey (GY)	2-10	156-00085
	4.6	200.0	46.0	225	16.0	6.4 - 7.1	0.8 - 3.0	PA66HS	PA66HIR	Black (BK)	2-10	156-05902
T50RFT6LGSD-HEX	4.6	202.0	45.0	225	16.0	6.25 - 6.75	0.7 - 5.0	PA66HS	PA66HIRHS	Black (BK)	2-10	156-00399
T50RFT6	4.6	202.0	45.0	225	16.0	6.4 - 7.1	0.8 - 3.0	PA46	PA46	Grey (GY)	2-10	156-01291
	4.6	202.0	45.0	225	16.0	6.4 - 7.1	0.8 - 3.0	PA46	PA46	Grey (GY)	2-10	150-77938
	4.6	202.0	45.0	225	16.0	6.4 - 7.1	0.8 - 3.0	PA66HS	PA66	Black (BK)	2-10	150-77941
T50RFT6LG	4.6	202.0	44.0	225	16.0	6.4 - 7.1	0.8 - 6.0	PA66HS	PA66HIRHS	Black (BK)	2-10	150-31091
T80IFT6LG	4.6	300.0	81.0	356	16.0	6.4 - 7.1	0.8 - 6.0	PA66HS	PA66HIRHS	Black (BK)	2-12	150-31096
T50RDHFT6	4.7	210.0	19.0	180	16.0	6.4 - 7.1	0.8 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2-10	150-77936
T80LFT6	5.0	390.0	108.0	355	16.0	6.4 - 7.1	0.8 - 3.0	PA66HS	PA66HIRHS	Black (BK)	2-12	150-77934

All dimensions in mm. Subject to technical changes.

Recommended Tools											
2	3	4	5	6	7	8	9	10	11	12	
MK20	MK21	MK3SP	MK3PNSP2	EVO7	MK7HT	MK7P	MK6	MK9	MK9HT	MK9P	

For more information on toolings please refer to the Application Tooling chapter.




Material specification please see page 24.




### 2-Piece Fixing Ties with Fir Tree, with Disc, for Round Holes


#### Fir Tree Parts FT7 - FT10

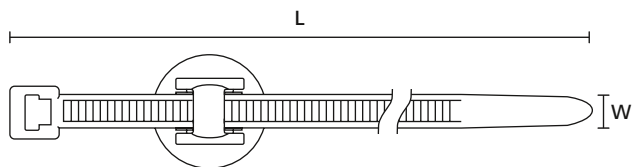


T50RFT8GSD

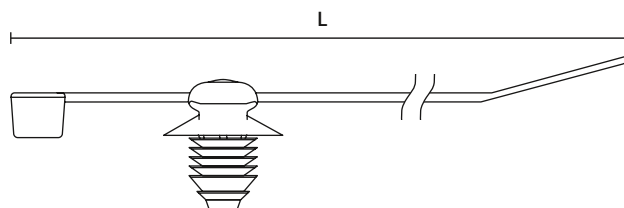


T50RFT8GSD




T50IFT7




T50RFT8



T50RFT8GSD



T120IFT9



T50RFT10

TYPE	Width (W)	Length (L)	Bundle Ø max.	N	Disc Ø	Hole Ø (FH)	Panel Thickness	Material Cable Tie	Material Foot Part	Colour	Tools	Article-No.
V150RFT10	3.3	150.0	35.0	150	18.0	9.7 - 10.0	0.8 - 5.0	PA66	PA66HS	Black (BK)	2;4-6	156-01233
T40RFT8GSD	4.0	180.0	40.0	180	16.0	8.0 - 8.5	1.5 - 4.0	PA66HS	PA66HIRHS	Black (BK)	2;4-8	156-00104
T50RFT7	4.6	200.0	44.0	225	16.0	6.5 - 7.0	0.8 - 7.0	PA66HS	PA66HS	Black (BK)	2-10	111-85871
T50RFT10	4.6	200.0	45.0	225	18.0	9.7 - 10.0	0.8 - 5.0	PA66HS	PA66HS	Black (BK)	2-10	111-85810
T50ROSFT10	4.6	200.0	45.0	225	18.0	9.7 - 10.0	0.8 - 5.0	PA66HS	PA66HS	Black (BK)	2-10	156-00120
T50RFT8	4.6	200.0	49.0	225	16.0	7.7 - 8.0	0.8 - 6.0	PA66HS	PA66HS	Black (BK)	2-10	111-85880
T50RFT7HD	4.6	200.0	45.0	225	21.6	6.2 - 7.2	0.8 - 7.0	PA46	PA46	Brown (BN)	2-10	156-00457
T50RFT8GSD	4.6	202.0	45.0	225	16.0	8.0 - 8.5	1.5 - 4.0	PA66HS	PA66HIRHS	Black (BK)	2-10	133-00034
	4.6	202.0	45.0	225	16.0	8.0 - 8.5	1.5 - 4.0	PA46	PA46	Grey (GY)	2-10	156-00235
T50IFT7	4.6	300.0	81.0	225	16.0	6.5 - 7.0	0.8 - 7.0	PA66HS	PA66HS	Black (BK)	2-10	150-00700
T120IFT9	7.6	300.0	80.0	535	20.0	9.0 - 10.6	5.0 - 11.0	PA66HIR(S)	PA66HIR(S)	Black (BK)	3;9-12	156-00200

All dimensions in mm. Subject to technical changes.

#### Recommended Tools

2	3	4	5	6	7	8	9	10	11	12
MK20	MK21	MK3SP	MK3PNSP2	EVO7	MK7HT	MK7P	MK6	MK9	MK9HT	MK9P

For more information on toolings please refer to the Application Tooling chapter.

## Material Specification Overview

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
Aluminium-alloy	AL	-40 °C to +180 °C	Natural (NA)		<ul style="list-style-type: none"> <li>Corrosion resistant</li> <li>Antimagnetic</li> </ul>	RoHS
Chloroprene	CR	-20 °C to +80 °C	Black (BK)		<ul style="list-style-type: none"> <li>Weather-resistant</li> <li>High yield strength</li> </ul>	RoHS
Ethylene Tetrafluoroethylene	E/TFE	-80 °C to +170 °C	Blue (BU)	UL94 V0	<ul style="list-style-type: none"> <li>Resistance to radioactivity</li> <li>UV-resistant, not moisture sensitive</li> <li>Good chemical resistance to: acids, bases, oxidizing agents</li> </ul>	RoHS
Polyacetal	POM	-40 °C to +90 °C, (+110 °C, 500 h)	Natural (NA)	UL94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Flexible at low temperature</li> <li>Not moisture sensitive</li> <li>Robust on impacts</li> </ul>	RoHS
Polyamide 11	PA11	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Bio-plastic, derived from vegetable oil</li> <li>Strong impact resistance at low temperature</li> <li>Very low moisture absorption</li> <li>Weather-resistant</li> <li>Good chemical resistance</li> </ul>	HF RoHS
Polyamide 12	PA12	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Good chemical resistance to: acids, bases, oxidizing agents</li> <li>UV-resistant</li> </ul>	HF RoHS
Polyamide 4.6	PA46	-40 °C to +150 °C (5000 h), +195 °C (500 h)	Natural (NA), Grey (GY)	UL94 V2	<ul style="list-style-type: none"> <li>Resistance to high temperatures</li> <li>Very moisture sensitive</li> <li>Low smoke sensitive</li> </ul>	HF LFH RoHS
Polyamide 6	PA6	-40 °C to +80 °C	Black (BK)	UL94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> </ul>	RoHS
Polyamide 6, high impact modified	PA6HIR	-40 °C to +80 °C	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> </ul>	RoHS
Polyamide 6.6	PA66	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK), Natural (NA)	UL94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> </ul>	HF RoHS
Polyamide 6.6, glass-fibre reinforced	PA66GF13, PA66GF15	-40 °C to +105 °C	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Good resistance to: lubricants, vehicle fuel, salt water and many solvents</li> </ul>	HF RoHS
Polyamide 6.6, heat and UV stabilised	PA66HSW	-40 °C to +105 °C	Black (BK)	UL94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> <li>Modified elevated max. temperature</li> <li>UV-resistant</li> </ul>	HF RoHS
Polyamide 6.6, heat stabilised	PA66HS	-40 °C to +105 °C	Black (BK), Natural (NA)	UL94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> <li>Modified elevated max. temperature</li> </ul>	HF RoHS
Polyamide 6.6, high impact modified	PA66HIR	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> </ul>	RoHS
Polyamide 6.6, high impact modified, heat and UV stabilised	PA66HIRHSW	-40 °C to +110 °C	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> <li>Modified elevated max. temperature</li> <li>High yield strength, UV-resistant</li> </ul>	HF RoHS
Polyamide 6.6, high impact modified, heat stabilised	PA66HIRHS	-40 °C to +105 °C	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> <li>Modified elevated max. temperature</li> </ul>	RoHS
Polyamide 6.6, high impact modified, scan black	PA66HIR(S)	-40 °C to +80 °C, (+105 °C, 500 h)	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Limited brittleness sensitivity</li> <li>Higher flexibility at low temperature</li> </ul>	HF RoHS
Polyamide 6.6, UV-resistant	PA66W	-40 °C to +85 °C, (+105 °C, 500 h)	Black (BK)	UL94 V2	<ul style="list-style-type: none"> <li>High yield strength</li> <li>UV-resistant</li> </ul>	HF RoHS

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton is also using equivalent E/TFE raw material from other suppliers.

\*These details are only rough guide values. They should be regarded as a material specification and are no substitute for a suitability test. Please see our datasheets for further details.

\*\*More colours on request.



= Minimum Loop Tensile Strength for Cable Ties (Newton)

HF = Halogenfree  
LFH = Limited Fire Hazard  
RoHS = Restriction of Hazardous Substances

MATERIAL	Material Shortcut	Operating Temperature	Colour**	Flammability	Material Properties*	Material Specifications
<b>Polyamide 6.6</b> , with metal particles	PA66MP	-40 °C to +85 °C, (+105 °C, 500 h)	Blue (BU)	UL94 HB	<ul style="list-style-type: none"> <li>High yield strength</li> <li>Metal and X-Ray detectable</li> </ul>	HF RoHS
<b>Polyamide 6.6 V0</b>	PA66V0	-40 °C to +85 °C	White (WH)	UL94 V0	<ul style="list-style-type: none"> <li>High yield strength</li> <li>Low smoke emission</li> </ul>	HF LFH RoHS
<b>Polyamide 6.6 V0</b> , High Oxygen Index	PA66V0-HOI	-40 °C to +85 °C, (+105 °C, 500 h)	White (WH)	UL94 V0	<ul style="list-style-type: none"> <li>High yield strength</li> <li>Low smoke emissions</li> </ul>	HF LFH RoHS
<b>Polyester</b>	SP	-50 °C to +150 °C	Black (BK)	Halogen free	<ul style="list-style-type: none"> <li>UV-resistant</li> <li>Good chemical resistance to: most acids, alkalis and oils</li> </ul>	HF LFH RoHS
<b>Polyetheretherketone</b>	PEEK	-55 °C to +240 °C	Beige (BGE)	UL94 V0	<ul style="list-style-type: none"> <li>Resistance to radioactivity</li> <li>Not moisture sensitive</li> <li>Good chemical resistance to: acids, bases, oxidizing agents</li> </ul>	HF LFH RoHS
<b>Polyethylene</b>	PE	-40 °C to +50 °C	Black (BK), Grey (GY)	UL94 HB	<ul style="list-style-type: none"> <li>Low moisture absorption</li> <li>Good chemical resistance to: most acids, alcohol and oils</li> </ul>	HF RoHS
<b>Polyolefin</b>	PO	-40 °C to +90 °C	Black (BK)	UL94 V0	<ul style="list-style-type: none"> <li>Low smoke emissions</li> </ul>	HF LFH RoHS
<b>Polypropylene</b>	PP	-40 °C to +115 °C	Black (BK), Natural (NA)	UL94 HB	<ul style="list-style-type: none"> <li>Floats in water</li> <li>Moderate yield strength</li> <li>Good chemical resistance to: organic acids</li> </ul>	HF RoHS
<b>Polypropylene, Ethylene- Propylene-Dien- Terpolymere-rubber</b> free of Nitrosamine	PP, EPDM	-20 °C to +95 °C	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>Good resistance to high temperatures</li> <li>Good chemical and abrasion resistance</li> </ul>	HF RoHS
<b>Polypropylene</b> with metal particles	PPMP	-40 °C to +115 °C	Blue (BU)	UL94 HB	<ul style="list-style-type: none"> <li>Floats in certain liquids</li> <li>Metal and X-Ray detectable</li> <li>Heat resistant</li> <li>Moderate yield strength</li> <li>Good chemical resistance</li> </ul>	RoHS
<b>Polyvinylchloride</b>	PVC	-10 °C to +70 °C	Black (BK), Natural (NA)	UL94 V0	<ul style="list-style-type: none"> <li>Low moisture absorption</li> <li>Good chemical resistance to: acids, ethanol and oil</li> </ul>	RoHS
<b>Stainless Steel, Stainless Steel</b>	SS304, SS316	-80 °C to +538 °C	Natural (NA)	Non burning	<ul style="list-style-type: none"> <li>Corrosion resistant</li> <li>Antimagnetic</li> <li>Weather resistant</li> <li>Outstanding chemical resistance</li> </ul>	HF LFH RoHS
<b>Thermoplastic Polyurethane</b>	TPU	-40 °C to +85 °C	Black (BK)	UL94 HB	<ul style="list-style-type: none"> <li>High elasticity</li> <li>Good chemical resistance to: acids, bases and oxidizing agents</li> </ul>	HF RoHS

Tefzel® is a registered trademark of DuPont. General linguistic usage for cable ties made from raw material E/TFE is Tefzel®-Tie. In addition to Tefzel® from DuPont HellermannTyton is also using equivalent E/TFE raw material from other suppliers.

\*These details are only rough guide values. They should be regarded as a material specification and are no substitute for a suitability test. Please see our datasheets for further details.

\*\*More colours on request.



**N** = Minimum Loop Tensile Strength  
for Cable Ties (Newton)

HF = Halogenfree

LFH = Limited Fire Hazard

RoHS = Restriction of Hazardous Substances