

IEWC 1637COBS-0QS1

REVISIONS:

DATE:

NUMBER OF PRIMARIES: 37

CONDUCTOR: 16 AWG (65/34) BARE COPPER

PRIMARY INSULATION: .015" NOM. WALL TPE

PRIMARY O.D.: .085" NOM.

COLOR CODE:

BLK, RED, BLU, ORA, YEL, BRN, GRN, RED/BLK, BLU/BLK, ORA/BLK, YEL/BLK, BRN/BLK, BLK/RED, BLU/RED, ORA/RED, YEL/RED, BRN/RED, BLK/BLU, RED/BLU, ORA/BLU, YEL/BLU, BRN/BLU, BLK/ORA, RED/ORA, BLU/ORA, YEL/ORA, BRN/ORA, BLK/YEL, RED/YEL, BLU/YEL, ORA/YEL, BRN/YEL, BLK/BRN, RED/BRN, BLU/BRN, ORA/BRN, YEL/BRN

FILLER: SOLID TPE

BINDER: NON-WOVEN POLYESTER TAPE

SHIELD: 34 AWG TINNED PLATED COPPER BRAID

85% MINIMUM COVERAGE

SEPARATOR: NON-WOVEN POLYESTER TAPE

OUTER JACKET: .060" NOM. WALL TPE

DIAMETER: .755" NOMINAL

COLOR: BLACK

PRINT LEGEND: OMERIN USA - QS TECH TPE 300V 105C

CABLE RATINGS: 300V


TEMPERATURE: 105°C

ROHS COMPLIANT

PN 774635

DATE: 8/27/20

DRAWN: SW

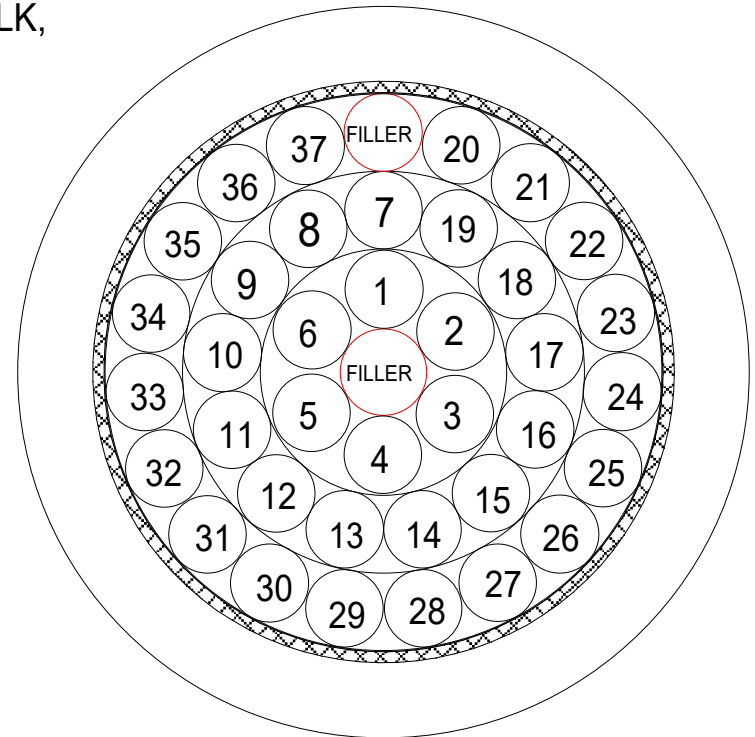

INDUSTRIAL ELECTRIC  
WIRE & CABLE, INC.

5001 S. TOWNE DR  
NEW BERLIN, WISCONSIN 53151