



DESC: 18/3 CABLE 105°C 300V

DWI NO: 1803C019

SCALE: 20x

DATE: 3/2/05

DR. BY: DP LANGER

NWI NO: FCAB183-017

CUSTOMER: INDUSTRIAL ELECTRIC

CUSTOMER P/N: T.B.D.


ITEM

SPECS.

- A. 18 GAUGE 16x30TC BUNCHED  
O.D. .049±.003"
- B. 23 MILS PVC INSULATION 105°C 300V  
20 MILS MIN. PVC INSULATION  
O.D. .095±.002" GPT TYPE CONDUCTORS
- C. TISSUE PAPER SEPARATOR
- D. 30 MILS PRESSURED PVC JACKET 105°C 300V  
24 MILS MIN. PVC JACKET BLACK JACKET  
CABLE IS NOT UL OR CSA APPROVED

**NORTHWIRE RESTRICTED**

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

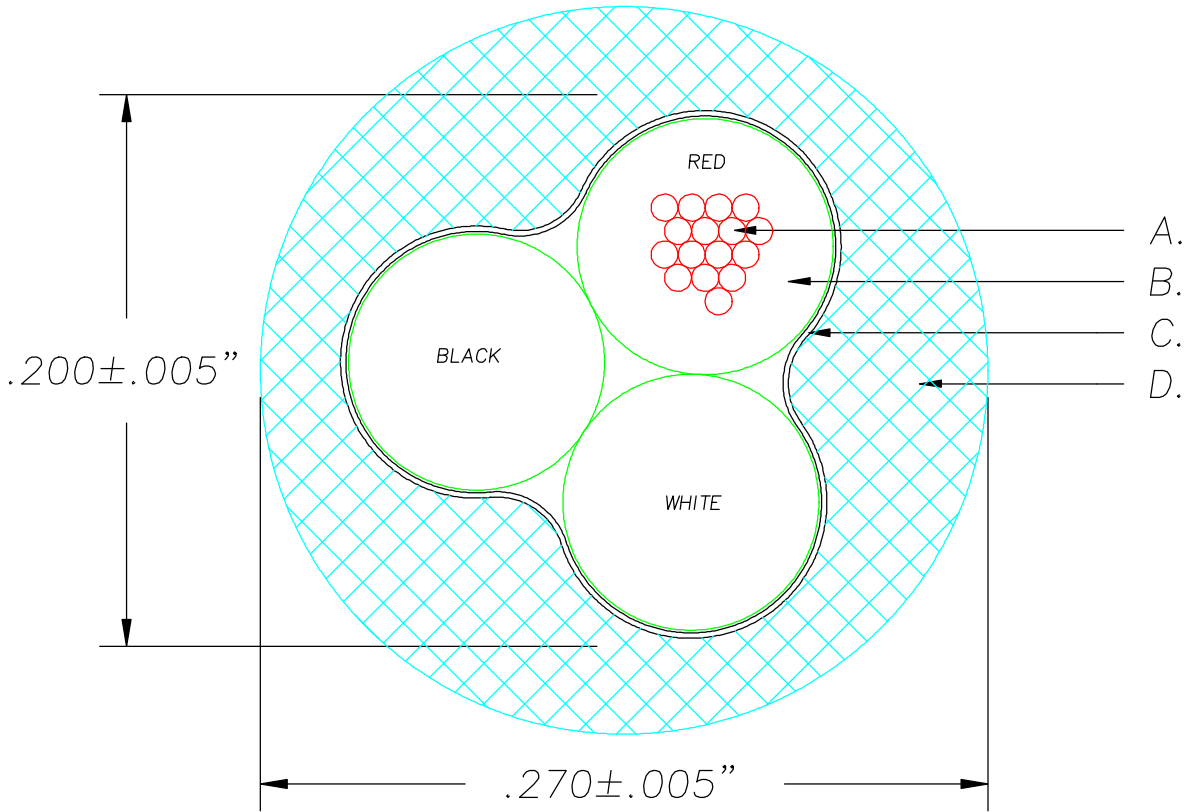

ELECTRICAL REQUIREMENTS:  
NONE SPECIFIED

MECHANICAL REQUIREMENTS:  
NONE SPECIFIED

INITIAL RELEASE	A	3/2/05	DPL	
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL