


NUMBER OF PRIMARIES: 10
AWG/STRAND: 20 AWG (19/32) TINNED PLATED COPPER
CONDUCTOR O.D.: .038" NOMINAL
PRIMARY INSULATION: .010" NOMINAL WALL TEFZEL
PRIMARY O.D.: .058" +/- .002"
COLOR CODE: BLACK, RED, WHITE, GREEN, ORANGE, BLUE,
BROWN, YELLOW, VIOLET, GRAY
DRAIN WIRE: 20 AWG (19/32) TINNED PLATED COPPER
1ST SHIELD: ALUMINUM/MYLAR/ALUMINUM
2ND SHIELD: 85% MIN. 36 AWG TINNED PLATED COPPER BRAID
JACKET: .018" NOMINAL WALL TEFZEL
JACKET COLOR: GRAY
FINISHED O.D.: .300" NOMINAL
RATED: 600 VOLTS 150C

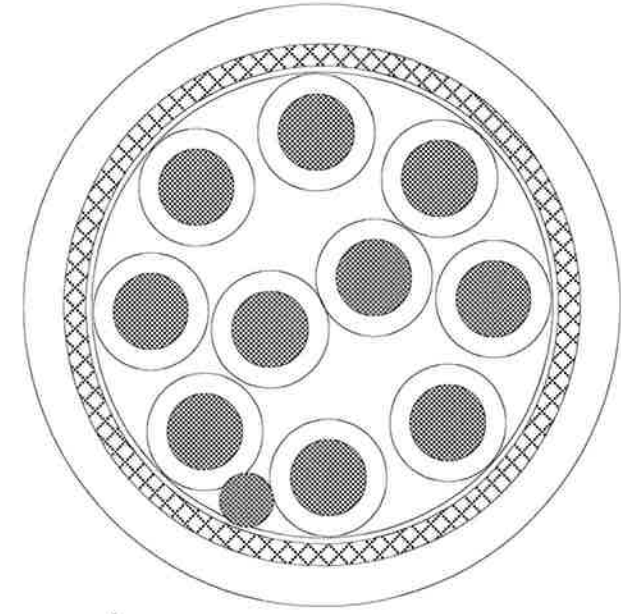

DISC.: 10/C 20AWG DOUBLE SHIELD

INDUSTRIAL ELECTRIC WIRE & CABLE
31390 VIKING PARKWAY
WESTLAKE, OHIO 44145
TEL. 800-321-5601 FAX 440-835-5971

P/N: IE122396

DATE: 1/8/04

DRAWN BY: R.E.D.