

# Drop Wire

# Spec. 4295

BELL SYSTEM TYPE F DROP AND RDUP (RUS) PE-7

**Product Construction:**

**Conductors:**

- 18½ AWG solid 30% conductivity extra high strength copper-covered steel

**Sheath:**

- Black, flame-, weather- and abrasion-resistant PVC compound extruded over two conductors in a parallel configuration

**Polarity Identification:**

- Polarity ridge on one leg of the web located at 45° above the major axis of the wire cross-section

**Application(s):**


- Self-supporting one pair parallel conductor drop wire intended for aerial service connection to the subscriber

**Compliances:**

- Telcordia (Bellcore) Specification GR-3163-CORE
- Rural Development Utility Program (RDUP) Bulletin 1753 F-204 (RUS PE-7)
- ANSI/ICEA S-89-648-1993
- RoHS Compliant (effective 1/1/10)

**Packaging:**

- Available in coils (CL) and Pull-Pac® cartons (PP)

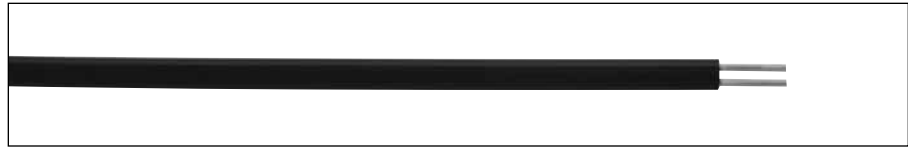

CATALOG NUMBER	PAIRS AWG	O.D. (INCHES)	WEIGHT (LBS/MFT)	STANDARD LENGTH (FT)
7021421	1	18½	0.130 x 0.255	24 1000 CL
7021496	1	18½	0.130 x 0.255	24 1000 PP

Data subject to change without notice. Contact your Customer Service Representative for latest information.



# C Rural Wire

# Spec. 4283

BELL SYSTEM TYPE

**Product Construction:**

**Conductors:**

- 14 or 12 AWG solid 30% conductivity extra high strength copper-covered steel

**Sheath:**

- Black, high density polyethylene compound extruded over two conductors in a parallel configuration

**Polarity Identification:**

- Polarity ridge on one minor face of the insulation located at 45° above the major axis of the wire cross-section

**Application(s):**

- Self-supporting one pair parallel conductor drop wire intended for aerial distribution in rural exchange areas

**Compliances:**

- Telcordia (Bellcore) Specification TA-TSY-000125
- RoHS Compliant (effective 1/1/10)

**Packaging:**

- Available in coils (CL) and reels (RL)



**Nominal Cable Data**

CATALOG NUMBER	PAIRS AWG	O.D. (INCHES)	WEIGHT (LBS/MFT)	STANDARD LENGTH (FT)
6307482	1	14	0.160 x 0.280	35 1000 CL
3114733	1	14	0.160 x 0.280	35 5000 (21") RL
7013881	1	14	0.160 x 0.280	35 5500 (29") RL
2091013	1	12	0.190 x 0.315	58 4000 (21") RL

Data subject to change without notice. Contact your Customer Service Representative for latest information.

