


22 AWG 2 Conductor Plenum Communications Cable

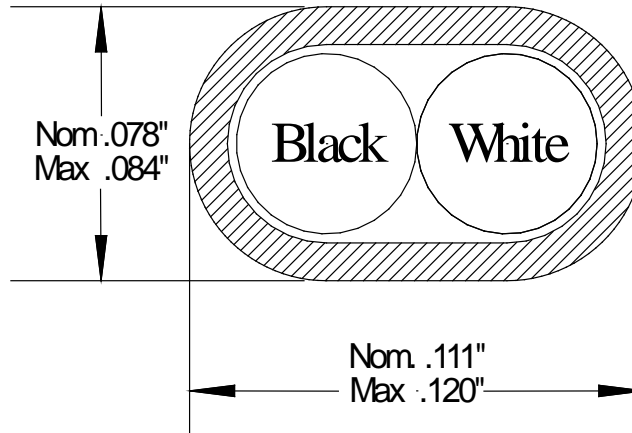

1. Construction:

- 1.1. Conductors: 22 AWG 7 Strand Bare Copper
- 1.2. Insulation: Plenum Polyvinyl Chloride 0.0415" Nom.
- 1.3. Color Code: Black, White
- 1.4. Core Assembly: 2 Conductors Pulled in Parallel
- 1.5. Jacket: White Plenum PVC, 0.014" Nominal Wall.
Overall Nominal Diameter 0.078" x .111"
Maximum Diameter 0.084" x .120"

- 1.6. **JACKET PRINT:** Black Ink

E111272 (01-12345) 22 AWG CL3P/FPLP (UL) OR CMP
C(UL)US RoHS
Sequential Footage Markers Every 2 Feet.

2. Electrical Characteristics:

- 2.1. Capacitance @ 1KHz: 24 pF/ft. Nominal
Conductor to Conductor

3. Specifications:


- 3.1. UL 13, Power Limited Circuit Cable
- 3.2. UL 1424 Power Limited Fire Alarm Circuit Cable
- 3.3. UL 444, Communication Cables
- 3.4. NFPA 262, Plenum Flame Test (UL 910)
- 3.5. NEC Article 725, 760 and 800

4. Certifications:

- 4.1. UL Listed Type CL3P/FPLP
- 4.2. c(UL)US Listed Type CMP
- 4.3. California State Fire Marshal Approved

5. Physical Requirements:

- 5.1. Jacket must be oval.
- 5.2. Jacket must not exceed maximum diameters.
- 5.3. Jacket must be able to be stripped from insulated conductors.

TITLE:		DESCRIPTION		Comtran Cable LLC		 <small>A Marmor Wire & Cable/Berkshire Hathaway Company</small>	
35667		22 AWG 2 Conductor Plenum Communications Cable		330A Turner Street South Attleboro, MA 02703 Phone: 508-399-7004 Fax: 508-399-8839			
Rev	Date	Detail	Eng.	App.			
4	06/24/15	Change Header	PAB	KN			
3	06/22/15	Added Physical Requirement; Max Diameters Ref SCAR 1100044907	PAB	KN			
2	01/03/13	C(UL)US	PA				
1	10/08/10	First release	2ME				

Comtran Cable LLC Reserves the right to change the information above without prior notification. Comtran Cable LLC assumes no risk, and is not liable for direct or indirect, or consequential damages, resulting from the use of this document