

CONDUCTORS
22 AWG
(3 TOTAL)


- 22 AWG 19/34 AWG TIN COPPER INSULATED WITH .016" NOMINAL WALL OF PVC TO A NOMINAL O.D. OF .062"
- 4 CONDUCTORS TOTAL
- COLOR CODE: BLACK, BLUE, BROWN

ROTATION

- TOP OF EVERY SHIPPING REEL MUST MATCH COLOR ROTATION

SEPARATOR

- .0012" TISSUE PAPER, 25% MIN. OVERLAP

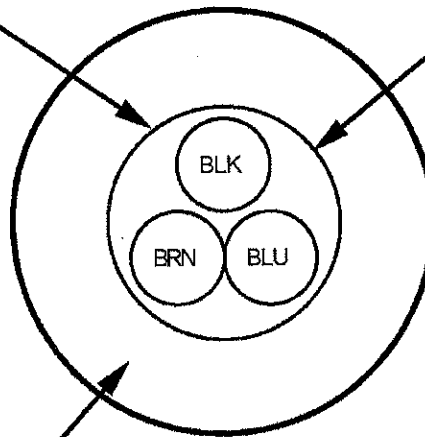

JACKET

- .033" NOMINAL WALL THICKNESS OF GRAY PVC TO A FINAL DIAMETER OF .200" (.190" MIN., .210" MAX)

- SURFACE PRINTED (IN BLACK INK): "E90298 RU AWM STYLE 2517 105C 300V VW-1 LL91737 CSA TYPE AWM I A/B 2 A/B 105C 300V FT1"

DATA GUIDE

CABLE CORP.

232 SHERMAN STREET
 GARDNER, MA 01440
 978-632-0900

REV	DESCRIPTION	DATE	APP.
1	REFORMAT-UPDATE	5/11/11	
0	FIRST ISSUE	1/22/96	

TITLE			3 CONDUCTOR #22 UNSHIELDED ROHS
SCALE	P/N	REV	
N/A	95C15-5		
DATE	DRN. BY	APP. BY	
1/96	WJD		