


CONDUCTORS
(3 TOTAL)

- 22 AWG 7/30 TC WITH .015" WALL THICKNESS 90C POLYESTER ELASTOMER TO A NOMINAL O.D. OF .060" +/- .002".
- COLOR CODED AS FOLLOWS: RED, WHITE, BLACK

TAPE SHIELD

.0015" THICKNESS
ALUMINUM/POLYESTER,
FOIL FACING INWARD

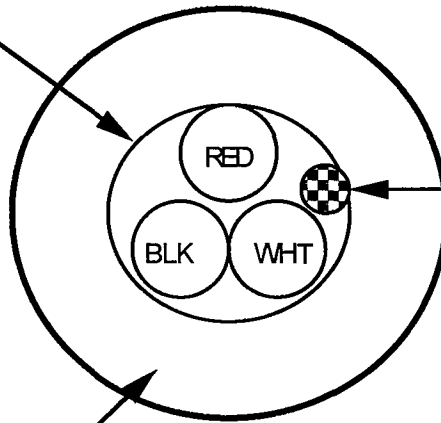

DRAIN

22 AWG STRANDED
TINNED COPPER
UNDER TAPE SHIELD

JACKET

.032" NOMINAL WALL THICKNESS (**GRAY) 90C PVC TO .200" NOMINAL DIAMETER

APPROVALS

UL AWM 10258/20886 90C 1000V
CSA AWM 90C 1000V
CE

CABLE CHARACTERISTICS

- RoHS COMPLIANT
- ** - CABLE WEIGHT: 27lbs/1000'

DATA GUIDE CABLE CORP.

560 MAIN STREET
GARDNER, MA .1440
978-632-0900

REV	DESCRIPTION	DATE	APP.
2	ADD COLOR CODES	11/18/09	
1	**ADD WEIGHT/1000'	11/17/09	
0	FIRST ISSUE	10/6/09	

TITLE

22/3C AWM RATED 90C 1000VOLTS

SCALE

N/A

P/N

09J25-8

REV

DATE

10/09

DRN. BY

WJD

APP. BY