

Delco Wire and Cable Product datasheet. Please call your sales rep for details.

PRODUCT DATA SHEET

34102 22 AWG 2 PAIR PVC UNSHIELDED CSA style - AWM A/B, CMGUL style - AWM, CM, CMR/CL3RFlame Test - FT4

Product Number: 34102
 Description: 22 AWG (7 X 30 AWG) TC 2 PR SR-PVC INSULATION, NA SHIELD, GRAY PVC JACKET

Image file:

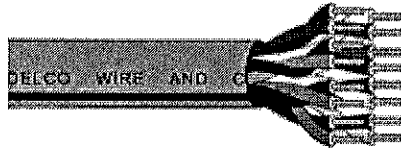


Image shown is a representation and does not necessarily reflect the actual product

AWG: 22
 Stranding: 7 X 30 AWG
 Conductor: TC
 Insulation: 0.009 inch SR-PVC
 Number Conductors: 4
 Number Pairs: 2
 First Shield: na
 Jacket Type: GRAY PVC
 Nom. Cable OD: 0.218
 Voltage: 600
 Temperature: -20°C to +105°C
 Weight: 22 lbs/mft
 CSA: AWM A/B, CMG
 UL: AWM, CM, CMR/CL3R
 Flame Test: FT4

Table 3

1 Black/Red	2 Black/White	3 Black/Green
4 Black/Blue	5 Black/Yellow	6 Black/Brown
7 Black/Orange	8 Red/White	9 Red/Green
10 Red/Blue	11 Red/Yellow	12 Red/Brown
13 Red/Orange	14 Green/White	15 Green/Blue
16 Green/Yellow	17 Green/Brown	18 Green/Orange
19 White/Blue	20 White/Yellow	21 White/Brown
22 White/Orange	23 Blue/Yellow	24 Blue/Brown
25 Blue/Orange	26 Brown/Yellow	27 Brown/Orange
28 Orange/Yellow	29 Violet/Orange	30 Violet/Red
31 Violet/White	32 Violet/Green	33 Violet/Blue
34 Violet/Yellow	35 Violet/Brown	36 Violet/Black
37 Gray/White		

Application: AUDIO, COMPUTER, CONTROL AND INDUSTRIAL EQUIPMENT

Delco Wire and Cable Limited

Although every attempt is made to insure the accuracy of this document, Delco Wire and Cable Limited can neither express any warranties nor assume any liabilities.

© Delco Wire and Cable Limited 2011

sales@delcowire.com

Cable Capability You Can Depend On

800.668.7127