


REV.	RELEASE NO.	DATE	DRAWN	APP.
1	02-3008	06/28/02	GJR	<i>202Y</i>
2	03-3678	10/6/03	GJR	<i>202Y</i>
3	07-5442	12/04/07	AJL	




THIS DRAWING REPRESENTS CONFIDENTIAL AND PROPRIETARY INFORMATION OF SSI TECHNOLOGIES, INC. AND SHALL NOT BE USED, ALTERED, OR DISCLOSED, IN WHOLE OR IN PART, WITHOUT THE EXPRESS WRITTEN APPROVAL OF SSI TECHNOLOGIES, INC. ANY USE OF THIS DRAWING SHALL BE SUBJECT TO SSI TECHNOLOGIES, INC. SUPPLIER QUALITY ASSURANCE SPECIFICATION 50A9001.

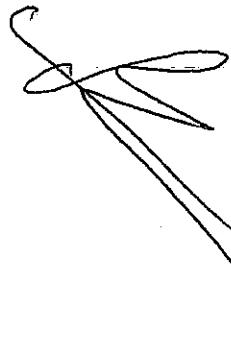

SSI Technologies, Inc.

**NOTES:**

- 1) 4 CONDUCTORS: 24 GAGE STRANDED, TINNED COPPER, 16 mils PVC - INSULATION, COLORS: RED, BLACK, GREEN, AND WHITE
- 2) OPAGUE MYLAR WRAP: 20% MIN. OVERLAP
- 3) 24/7X .0076TC DRAIN
- 4) SHIELD: ALUMINUM FOIL, 25% MIN OVERLAP
- 5) CABLE JACKET: 25 mils PVC - BLACK
- 6) SOURCES: NORTHWIRE INC. P/N: FAWN244-014
- 7) THIS COMPONENT SHALL BE MANUFACTURED AND CERTIFIED TO BE ROHS COMPLIANT

JOB NAME PRESSURE SENSOR		DO NOT SCALE		ASSEMBLY NO. - - - - -	
MATERIAL 4 CONDUCTOR WIRE - BULK		 3RD ANGLE PROJECTION REFER TO ANSI Y14.5M-1994		CUSTOMER I.D.	
SEE NOTES		COMPUTER DRAWN NO MANUAL CHANGE		DRAWG. NO. 14132.1	
DWG SIZE A	SHEET 1 OF 1	SCALE N/A	VERSION V18	REV. 3	