



181 Appleton Street
 Holyoke, MA 01040
 Tel (413) 539-9892
 Toll Free: (800) 952-8526
 Fax (413) 539-9770

Quote# 9037
 C.W.C # 5M2610990BPO1

Specification Sheet

Customer Part Number :


Description: 10/C 26 7/34 TC

Construction:

Conductors: 26 7/34 TC Nom: 0.019
 Insulation: CubiFlex191 Nom: 0.035 +- 0.004
 Color Code: BLK, WHT, GRN ,RED, BLU, ORG, WHT/BLK, RED/BLK, GRN/BLK, ORG/BLK
 Cable: BLK, WHT, GRN ,RED, BLU, ORG, WHT/BLK, RED/BLK, GRN/BLK, ORG/BLK
 WITH O/A ALUM/MYLAR AND 26 AWG TC DRAIN (FOIL OUT DRAIN OUT)
Yellow, Violet, Slate, Brown Nom: 0.144 +- 0.010

Braid	38 AWG TC	Coverage	55%	Nom	0.154 +- 0.010
Jacket	CubiFlexPVC105	Wall:	0.030	Nom:	0.225 +- 0.010
Color:	BLACK				

Print Legend : E24646 RU AWM STYLE 2990 80°C 30V VW-1

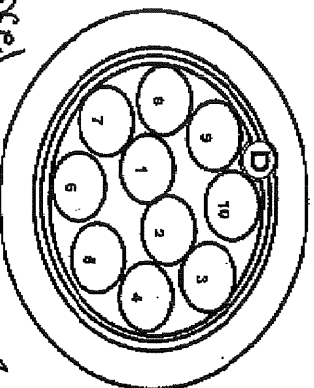

*Material is: Non Cancel
 Non Returnable*

Customer Approval

Approvals Rohs UL 2990 CSA N/A Rating 80°C / 30 Vac

This Cable Design is the Intellectual property of Cubit Wire & Cable Co., Inc. Intend for use by
 Cubit Wire & Cable Co., Inc. and their customers. Treat this as a confidential controlled document
 Proprietary Information

THIS DOCUMENT CAN ONLY BE DUPLICATED WITH THE WRITTEN PERMISSION FROM
 CUBIT WIRE AND CABLE CO., INC.

Note all O.D's are NOM

Spec Rev: A

** Please Note
 Change IN Conductor
 Colors*

MAY 13 2010