



Hueson Wire  
 38 Sutton Street  
 Northbridge, MA 01534  
 508-234-6372  
[bhanlon@huesonwire.com](mailto:bhanlon@huesonwire.com)

**Issue Date:** 3/17/2016  
**Issue:** 1

**Construction**

<b>Description:</b> 15/C 24 19/36 TC mPPE/mPPE		<b>Diam. (In)</b>
<b>Component:</b>	15 Conductors	
<b>Conductor:</b>	24 AWG 19/36 Tinned Copper to ASTM B-8	0.024"
<b>Insulation:</b>	0.007" mPPE UL Approved	0.038"
<b>Color Code:</b>	See Drawing for Colors and Rotation	0.038"
<b>Cable Assembly:</b>	15 Conductors Bunched Cabled	0.179"
<b>Fillers</b>	Fibrillated polypropylene or solid fillers for roundness (optional)	0.179"
<b>Tape:</b>	Non-Woven Separator Tape for Strip-Ability (optional)	0.182"
<b>Jacket:</b>	0.015" mPPE Polyphyneylene	0.212"
<b>Jacket Color:</b>	Black	0.212"

**Print:** E-174416 RU AWM 21460 80C 300V VW-1 C(RU) AWM I A/B FT1 80C 300V CE ROHS

<b>Specifications:</b>	<b>AWM Style</b>	<b>Temp</b>	<b>Voltage</b>	<b>Flame</b>	
<b>UL</b>	AWM-21460	80°C	300	VW-1	
Canadian cRU	AWM	80°C	300	FT-1	I/II A/B

**Environmental Compliance**

- EU Directive 2011/65/EC(RoHS):
- REACH Regulation (EC 1907/2006):
- California Prop 65:


IQ160130



Hueson Wire  
38 Sutton Street  
Northbridge, MA 01534  
508-234-6372  
[bhanlon@huesonwire.com](mailto:bhanlon@huesonwire.com)

Issue Date: 3/17/2016  
Issue: 1

**Drawing/Rotation:**

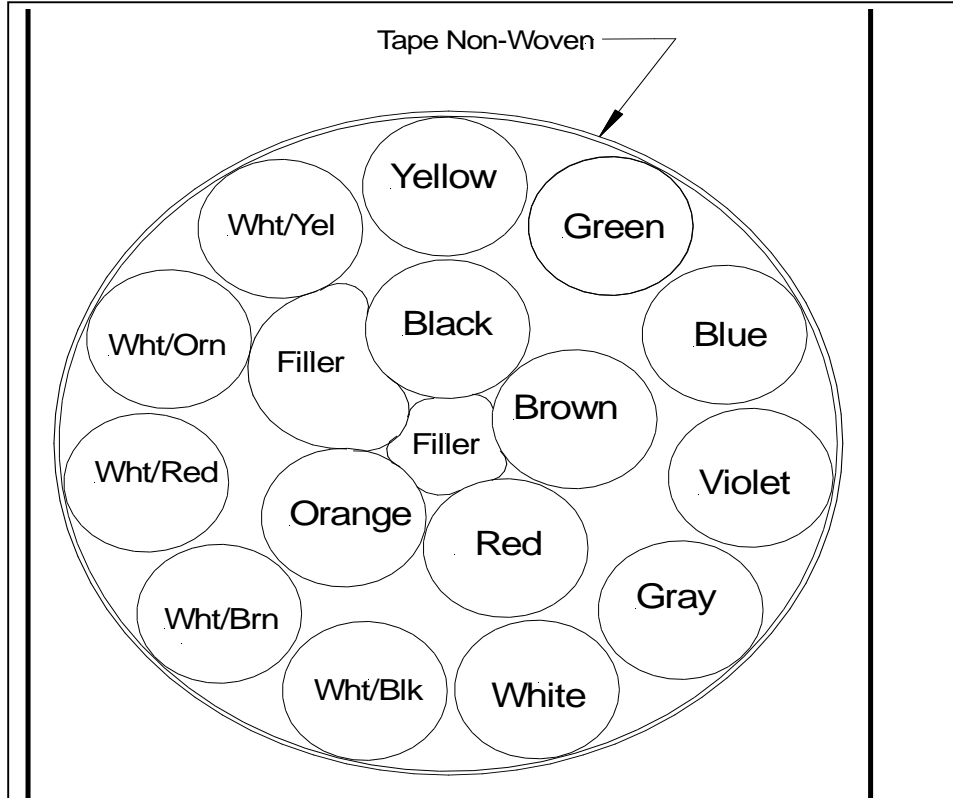

IQ160130