


**GeneralCable**  
**TWO CONDUCTOR #20AWG**  
**SHIELDED ULTRA CABLE**

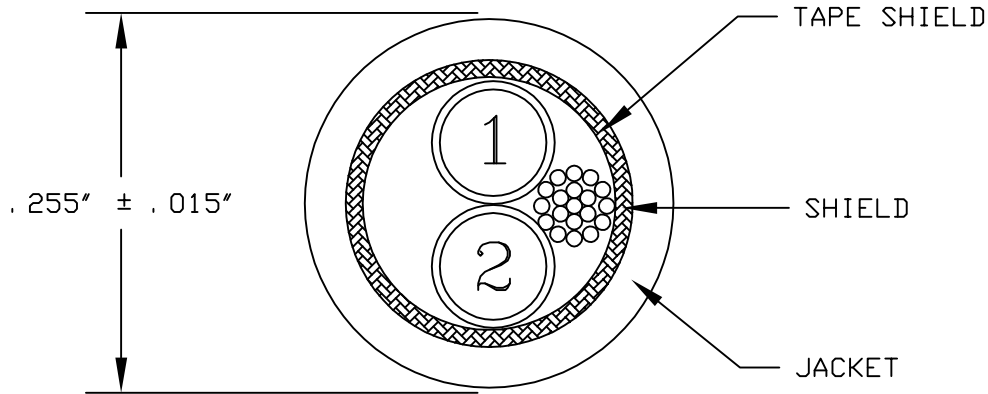

- COMPONENT I - CONDUCTOR: #20AWG 19/32 TINNED COPPER  
 (ITEMS 1-2) INSULATION: POLYRAD ULTRA-.010" NOMINAL WALL  
 SHEATH: CROSS-LINKED FLUOROPOLYMER-.005" NOMINAL WALL  
 DIAMETER: .068" NOMINAL
- DRAIN WIRE - #20AWG 19/32 TINNED COPPER
- CABLE - TWO (2) COMPONENT I (ITEMS 1-2) + ONE DRAIN WIRE  
 CABLED TOGETHER WITH A LEFT HAND LAY
- TAPE SHIELD - .0015" ALUMINUM/MYLAR TAPE FOIL FREE EDGE-25% MINIMUM OVERLAP  
 ALUMINUM SIDE IN AGAINST DRAIN WIRE
- SHIELD - #36AWG TINNED COPPER BRAID-85% COVERAGE
- JACKET - POLYRAD XT-ROHS (GRAY)-.045" NOMINAL WALL
- DIAMETER - .255" NOMINAL
- RATINGS - 125°C 600V
- MIN BEND RADIUS - STATIC: 1.25"  
 DYNAMIC 3.0"
- JACKET PRINT - "GENERAL CABLE (WC) POLYRAD ULTRA  
 ROHS 2/C 20AWG SHIELDED 125C 600V YEAR/MONTH"
- COLOR CODE -
- | ITEM NUMBER | COLOR |
|-------------|-------|
| 1           | WHITE |
| 2           | BLACK |

<b>REVISIONS</b>	0	03/28/13	FIRST ISSUE	<p style="font-size: 1.2em; margin: 0;"><b>GeneralCable</b></p> <p style="margin: 0;">1600 West Main Street, Willimantic, CT 06226-1128</p> <p style="font-size: 1.2em; margin: 0;"><u>The Power of One</u></p>	
	A	11/13/13	ADD GCC PART NUMBER		
DRAWING NO:				11-2001	
<b>REFERENCES</b>	ANIXTER/WABTEC PN 10252P MODIFIED			DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
	GeneralCable P/N 426840			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	