


Modular Plugs, Accessories and Tooling

Introducing the New Universal Contact

CAT 5E, Shielded EMT, 8-Position Plug (MP-5EMT-_-_)

Features

- Each kit includes:
 - (1) Modular plug assembly
 - (1) Wire holder
 - (1) Strain relief
- Use appropriate-sized Slim-Line Modular Plug Boot (ordered separately)

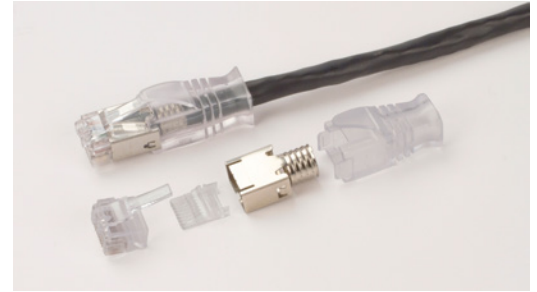

Ordering Information

Description	Conductor (AWG) ¹	Insulation OD	Cable Jack OD	500 Per Bag	100 Per Bag
Shielded EMT CAT 5E	23-24 Solid 24-26 Stranded	0.035" to 0.043" (0.89 to 1.09 mm)	0.18" to 0.22" (4.7 to 5.5 mm)	MP-5EMTA-5 (6-2111976-2)	MP-5EMTA-1 (6-2111976-3)
			0.20" to 0.24" (5.1 to 6.0 mm)	MP-5EMTB-5 (6-2111986-2)	MP-5EMTB-1 (6-2111986-3)
			0.22" to 0.28" (5.7 to 7.0 mm)	MP-5EMTC-5 (6-2111988-2)	MP-5EMTC-1 (6-2111988-3)

¹ Typical conductor size supported by insulation OD. Insulation OD is the determining specification

Shielded Slim-Line Modular Plug Boot (MP-Boot-S-SL-_-_)

Features

- For use with Category 6A/6 and Category 5e EMT modular plugs
- Accepts cables with maximum diameters listed
- Slim-line design support high-density applications
- Transparent boot eliminates need for colored boots to match cable jacket color
- Advised to use the smallest boot size possible that will accommodate cable



Ordering Information

Description	Cable Jack OD	1000 Per Bag
Shielded Slim-Line Boot	0.18" to 0.24" (4.7 to 6.0 mm)	MP-Boot-S-SL-AB (2153256-1)
	0.22" to 0.28" (5.7 to 7.0 mm)	MP-Boot-S-SL-C (2153257-1)