

# SILICOU<sup>®</sup>

## Style 3664 - 15 kV

UL approval  
-60 °C to +180 °C



### Approvals - standards

- UL approval (180 °C / 15000 V) as per standard UL 758 – File no.: E101965.
- cUL approval (CSA 200 °C / 15000 V) as per GTO-15 and standard C22.2 N° 127 – File no.: E211350.
  - Compliance with the tests described as per standard IEC 60092-350/354/360, IEC 60331-11/21, IEC 60332-1-1/2, IEC 60332-3-22 category A and IEC 60754-2.
  - Horizontal flame as per UL approval.


### Applications

- Cabling for rotating machines: motors, alternators, generators.
- Cabling for static machines: transformers, inductors, inverters, choppers.
- Shipbuilding and railway construction.
  - Power cabinets.

### Options

- Flexible bare copper core - class 5 as per IEC 60228: contact us.
- Flexible or extra-flexible silver-plated or nickel-plated copper core - class 5 or 6 as per IEC 60228: contact us.
  - Without reinforcing braid: contact us.
  - Varnished synthetic fibre reinforcing braid: contact us.
  - Very high temperature fibre reinforcing braid: contact us.
- Multi-conductor cable made up of an assembly of several single conductor cables SILICOU<sup>®</sup> Style 3664 15 KV: contact us.
  - Other colours: contact us.
- Other nominal metric or American cross-sections: contact us.
  - Other options and/or combinations of the options outlined above: contact us.

### SILICONE INSULATED MEDIUM VOLTAGE POWER CABLES WITH REINFORCING BRAID

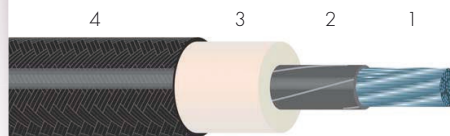

- 1 • Flexible tin-plated copper core - class 5 as per IEC 60228.
- 2 • Semi-conductor tape(s).
- 3 • Insulation: Silicone rubber.
- 4 • Reinforcement: Coated synthetic fibre braid.

### Characteristics

#### General

- Continuous operating temperatures: -60 °C to +180 °C.
- Good resistance to thermal shock and UV.
- Excellent mechanical strength.

#### Electrical

- Rated voltage: 15 kV.
- Test voltage: 30 kV.

### Standard products

- Standard insulation colour: white.
- Standard reinforcing braid colour: black.

### Style 3664 - 15 kV

#### Flexible core • class 5 as per IEC 60228

Nominal cross-section (mm <sup>2</sup> )	Nominal stranding	Maximum linear resistance at 20 °C (Ω/km)
2.5	19 × 0.40*	7.56
4	32 × 0.40*	4.70
6	48 × 0.40*	3.11
10	80 × 0.40	1.95
16	126 × 0.40	1.24
25	196 × 0.40	0.795
35	276 × 0.40	0.565
50	396 × 0.40	0.393
70	360 × 0.50	0.277
95	485 × 0.50	0.210
120	608 × 0.50	0.164
150	756 × 0.50	0.132
185	944 × 0.50	0.108
240	1221 × 0.50	0.0817
300	1525 × 0.50	0.0654
400	2037 × 0.50	0.0495

#### INSULATED WIRE OR CABLE

Nominal diameter (mm)	Approximate linear weight (kg/km)
10.6	116
11.0	135
11.8	167
13.1	224
14.2	287
15.7	390
17.2	496
18.9	649
21.3	847
23.2	1079
25.2	1349
27.9	1672
29.3	2017
33.1	2650
35.5	3209
39.6	4152

\* Tin-plated copper core – class 2 as per IEC 60228.

For this product, please contact:

OMERIN division principale

Zone Industrielle - F 63600 Ambert

Tel. +33 (0)4 73 82 50 00 - Fax +33 (0)4 73 82 50 10

omerin@omerin.com

**omerin**  
LES CABLES DE L'EXTREME

[www.omerin.com](http://www.omerin.com)

® Registered trademark of the OMERIN Group. All information is indicative and may be modified without prior notice. Drawings and photos are not contractual. Reproduction is prohibited without the prior agreement of OMERIN.