



DESC: 18/5 CABLE 105C 300V

DWG NO: 1805C009

SCALE: 20x

DATE: 2/22/00

DR. BY: JR FULTON

NWI NO: SEE BELOW

CUSTOMER: SEE BELOW


CUSTOMER P/N: SEE BELOW

ITEM	SPECS.
A.	18 AWG 41X34 BARE COPPER STRANDING NOM. O.D. .049±.003"
B.	5 MILS NOM. HYTREL INSULATION 105C 300V 4 MILS MIN. HYTREL INSULATION O.D. .062±.002"
C.	POLY FILLER
D.	PAPER SEPARATOR
E.	20 MILS TUBED POLYURETHANE JACKET 105C 300V 17 MILS MIN. TUBED POLYURETHANE JACKET JACKET COLOR: BLACK
CABLE IS NOT UL OR CSA APPROVED.	

NORTHWIRE P/N:	CUSTOMER P/N:
FCAB185-011 (MFT)	WJ-1805XF
FCAB185-013 (M)	W0304001
FCAB185-014	IEWC 129227

NORTHWIRE RESTRICTED

This document contains Northwire, Inc. proprietary data, and is not to be copied, reproduced, used or divulged to unauthorized persons, in whole or in part, without proper authorization in writing from Northwire, Inc. This information is the property of Northwire, Inc. which reserves all rights to it.

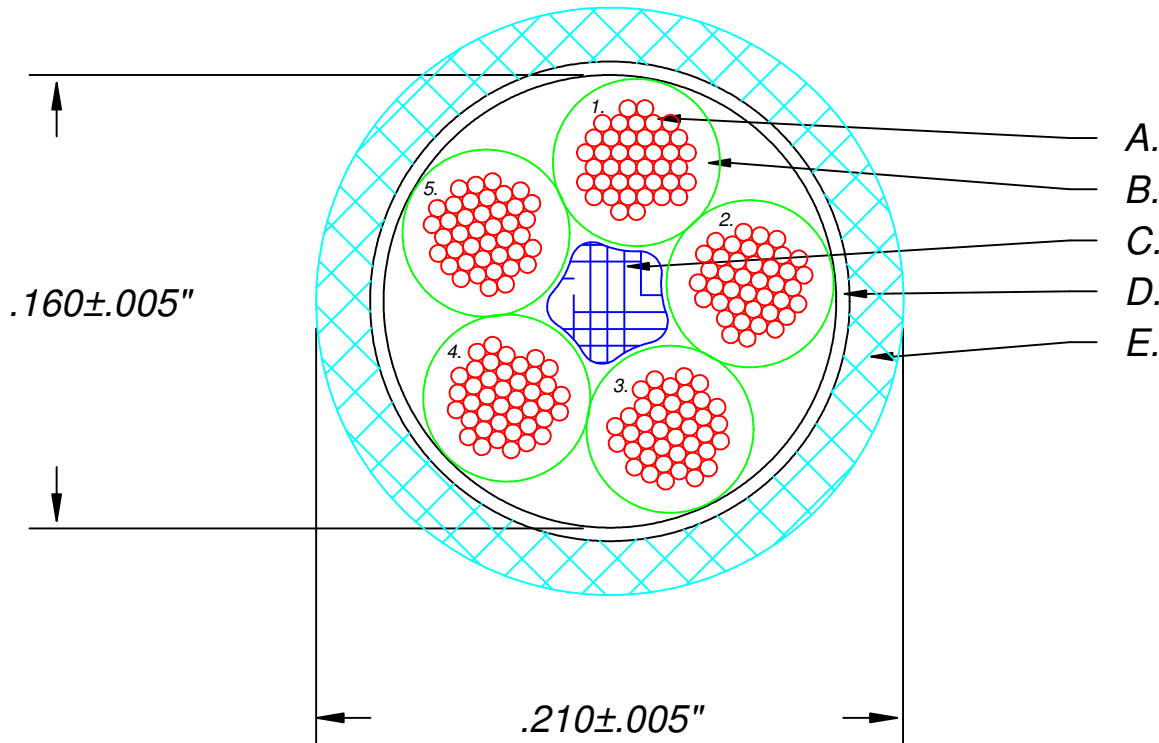

- A.
- B.
- C.
- D.
- E.

CONDUCTOR COLORS:
 1. BLACK
 2. WHITE
 3. RED
 4. GREEN
 5. BROWN

ELECTRICAL REQUIREMENTS:
 NONE SPECIFIED

MECHANICAL REQUIREMENTS:
 NONE SPECIFIED

ADDED PART NO: FCAB185-014	B	5/9/02	DPL			
Added part number for meters	A	7/31/01	cjm			
REVISION RECORD	REV	REV DATE	APPROVAL	APPROVAL		
Customer approval:	Date:					