

Issue Date: June 15,2020

Construction Issue: 2

Description:	12/C Comp 4/C 14 41/30 BC + 8/C 16 26/30 BC TPE/TPE		Diam. (In)
Components:	12 Conductors		
Conductor #1:	14 AWG 41/30 Bare Copper	4 Conductors	0.075 "
Insulation:	0.046" LSZH TPE Red List Free		0.167 "
Color Code:	Green, White, Red, Black		0.167 "
Conductor #2:	16 AWG 26/30 Bare Copper	8 Conductors	0.065 "
Insulation:	0.03" LSZH TPE Red List Free		0.125 "
Color Code:	Blk, Grn, Orn, Blu, Wht/Blk, Red, Wht, Red/Blk		0.125 "
Cable Assembly:	Bunch Cable 12 Conductors		0.540 "
Separator:	Non-Woven Polyester Wrapping		0.544 "
Jacket:	0.107" 70A Durometer Soft TPE Jacket		0.754 "
Jacket Color:	Black		0.754 "

Print:

(UL) E322633 14-4 16-8 SEOW AWM-20328 105C 600V (-40C) FT-2

Indent

Specifications:

Environmental Compliance

• RoHS EU Directive 2011/65/EU (1&2&3)

All materials used in the manufacture of this part are in compliance with EU Directive 2011/65/EU regarding the restriction of use of certain hazardous substances in electrical and electronic equipment.

• REACH Regulation 201:


This product does not contain Substances of Very High Concern (SVHC) listed on the European Union's REACH candidate list in excess of 0.1% mass of the item.

• California Prop 65: IQ-20036

The outer surface materials used in the manufacture of this part meet the requirements of California Prop. 65.

Issue Date: Issue: 2

Drawing/Rotation:

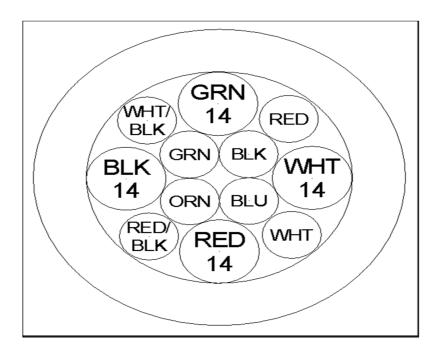

Issue 2: Changed Jacket Compound to 70A Durometer TPE Jacket 6/15/20

IQ-20036