



Hueson Wire
 38 Sutton Street
 Northbridge, MA 01534
 508-234-6372

bhanlon@huesonwire.com

Issue Date: 11/18/2019

Issue: 1

Construction C5912

Description:	4/C 18 16/30 TC PVC/PVC UL 20811 105°C 600V	Diam. (In)
Component:	4 Conductors	
Conductor:	18 AWG 16/30 Tinned Copper to ASTM B-174	0.047"
Insulation:	0.0115" Premium Grade PVC Insulation	0.07"
Color Code:	Black, White, Red, Green	0.07"
Cable Assembly:	4 Conductors Cabled	0.169"
Separator:	Non-Woven Polyester Wrapping	0.172"
Jacket:	0.032" Soft 70A AWM	0.236"
Jacket Color:	Gray	0.236"

Print: E174416 RU AWM 20811 105C 600V VW-1 --- cRU AWM I/II A/B 105C 600V FT-1

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	AWM-20811	105°C	600	VW-1
Canadian cRU	AWM	105°C	600	FT-1 I/II A/B

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2)
- REACH Regulation 169:
- California Prop 65:


IQ180446



Hueson Wire
38 Sutton Street
Northbridge, MA 01534
508-234-6372
bhanlon@huesonwire.com

Issue Date: 11/18/2019
Issue: 1

Drawing/Rotation:

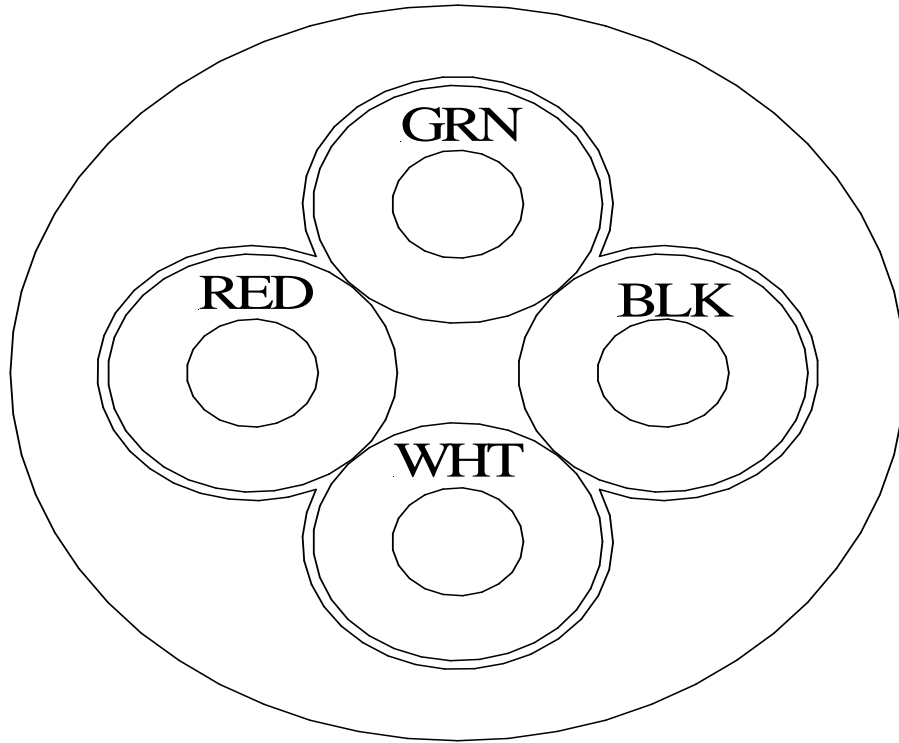

IQ180446