

# 26/2C, Overall Braided PP/PUR Cable



PRODUCT DATA SHEET

Flexible using.

**Design Number** 10114  
**Part Number** 32106705  
**Customer Number** N/A

## CONSTRUCTION

**Conductor:** Stranded tinned copper

**Conductor Size:** 26AWG(19/38)

**Insulation:** Polypropylene

**Insulation Thickness:** 0.007"(Nom.)

**Insulation Diameter:** 0.033"(Nom.)

**Cable Lay Length:** 1.25"

**Drain Wire:** Tinned copper, 24AWG 19 strands

**Braid:** 36AWG Tinned copper, 85% coverage


**Separator:** Tissue, 100% coverage

**Jacket Material:** Polyurethane

**Jacket Avg. Thickness:** 0.014"(Nom.)

**Overall Diameter:** 0.140"(Nom.)

**Jacket Color:** Matte Gray

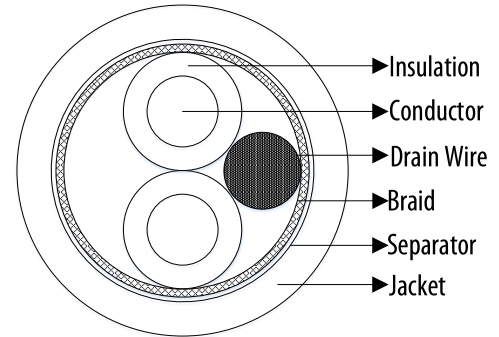

**Color Code:** Black, Red

## PHYSICAL CHARACTERISTICS

**Operating Temperature (°C):** 80°C

**RoHS Compliant:** European Directive 2015/863/EU

**Application:** Flexible using

*All trademarks are property of their respective owners. All specifications are subject to change.*

Revision History		
00	2020/11/19	Initial release
Created L. Jian	Approved A. Huang	

**Bristol** | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK

**Frankfurt** | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf

**Milwaukee** | 5001 South Towne Dr. New Berlin, WI 53151 USA

**Suzhou** | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

