

UL CMR/2464 22AWG/2PR, Foil Shielded Cable

PRODUCT DATA SHEET

Cable is suitable for installation under NEC (NFPA 70) article 800 guidelines.

Cable is suitable for installation in Canada under Section 60 of CEC, Part I.

Internal wiring or external interconnection of electronic equipment.


Design Number 10378
Part Number 32130971
Customer Number N/A

CONSTRUCTION

Conductor: Stranded tinned copper
Conductor Size: 22AWG(7/30)
Insulation: Polyvinyl Chloride
Insulation Thickness: 0.010"(Nom.)
Insulation Diameter: 0.050"(Nom.)
Pair Lay Length: 1.00"(Nom.)
Tape: Al-mylar (Aluminum side facing out), 100% coverage
Drain Wire: Stranded tinned copper, 22AWG 7 Strands
Cable Lay Length: 2.50"(Nom.)
Jacket Material: Polyvinyl Chloride
Jacket Thickness: 0.032"(Nom.)
Overall Diameter: 0.230"(Nom.)
Jacket Color: Gray

Print Legend (Footage Markers):

ASCENT E478021 22AWG 2PR SHIELDED 75C C(UL)US TYPE CMR SUN RES
 FT4 OR AWM 2464 300V 80C "ROHS COMPLIANT" MADE IN USA

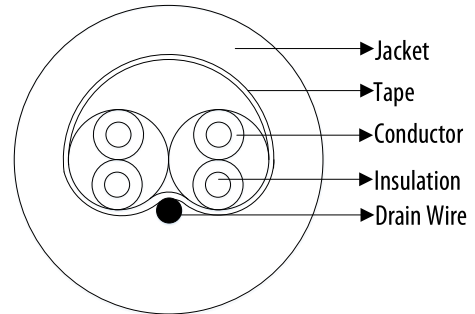

Color Code: Black x Red, Black x White

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 80°C
Operating Voltage: 300V
Weight: 27 Lbs/Mft
Flame Test: Cable meets (UL) 1685 (Vertical)

SAFETY CHARACTERISTICS

Approvals: UL AWM Style 2464 per UL standard 758
 C(UL)US listed as CMR per UL standard 444 and per CSA C22.2 No. 214-17
RoHS Compliant: European Directive 2015/863/EU
REACH Compliant: Regulation (EC) No 1907/2006 Updated Jan.15, 2019

Application: Internal wiring or external interconnection of electronic equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/09/09	Initial Release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park, Jiangsu, China 215122

