



Hueson Wire
 134 Ferry St.
 South Grafton, Ma 01560
 www.huesonwire.com

Issue Date: 4/8/2020

Issue: 1

Construction

Description: 6/C 24 7/32 TC PVC/PVC + O/A AMS + Drain		Diam. (In)
Component:	6 Conductors	
Conductor:	24 AWG 7/32 Tinned Copper to ASTM B-8	0.024 "
Insulation:	0.01" Premium Grade PVC 0.044 +/- .003"	0.044 "
Color Code:	Black, White, Red, Green, Brown, Blue	0.044 "
Cable Assembly:	Bunch Cable 6 Conductors	0.132 "
Drain Wire:	24 7/32 TC	0.132 "
Shield:	Aluminum Mylar Tape Foil Out	0.136 "
Jacket:	0.032" PVC CMG FT-4	0.200 "
Jacket Color:	Black 0.2 +/- 0.010"	0.200 "
Print:	E194074 24 AWG (UL) TYPE CM 75C OR AWM 2464 80C 300V VW-1 --- LL109360 CSA TYPE CMG 75C FT-4	

Specifications:	<u>AWM Style</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	AWM-2464	75°C	300	VW-1
Canadian cRU	AWM	75°C	300	FT-4


Environmental Compliance	
<ul style="list-style-type: none"> • RoHS EU Directive 2011/65/EU (1&2&3) • REACH Regulation 205: • California Prop 65: 	IQ-20149



Hueson Wire
134 Ferry St.
South Grafton, Ma 01560
www.huesonwire.com

Issue Date: 4/8/2020
Issue: 1

Drawing/Rotation:

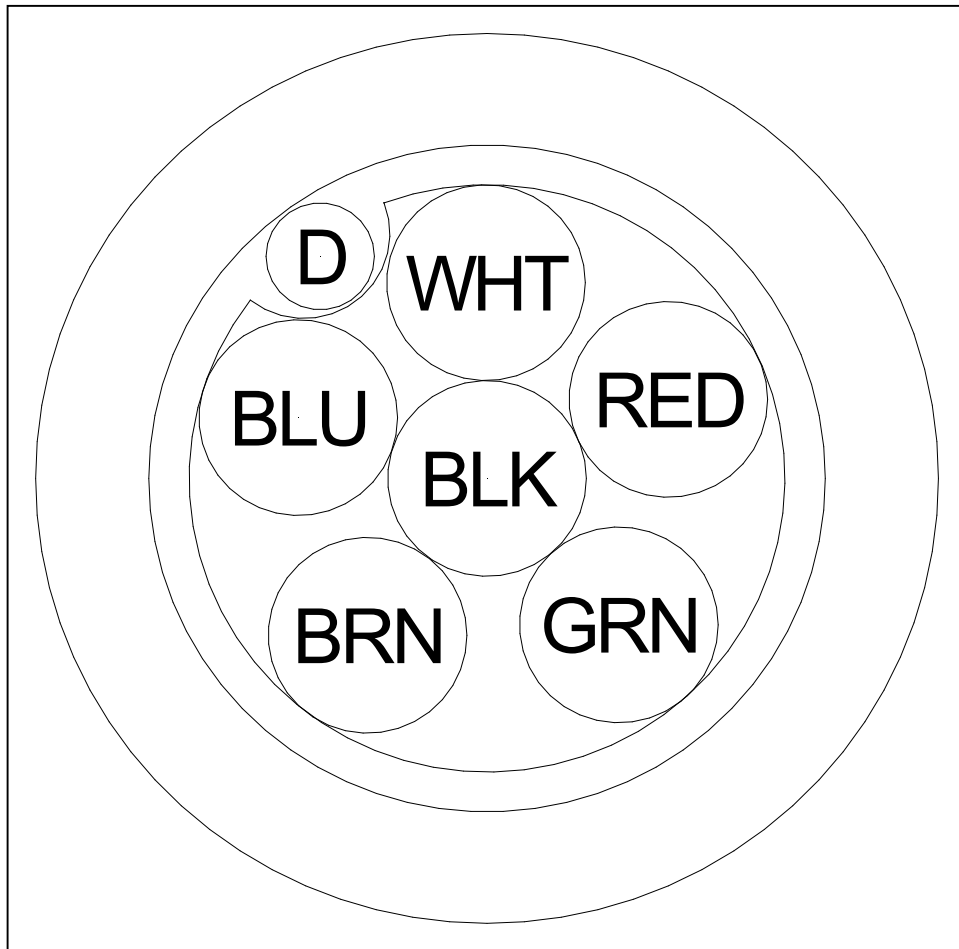

IQ-20149