


18/3 Type SVT Ribbed Brown



PRODUCT DATA SHEET

SVT is a light-duty service cord, rated at 300 volts with a temperature range up to 105°C. With extra-flexible stranding, PVC primary insulation, and PVC jacket, this cable is designed for indoor use where reduced cable outer diameter is preferred.

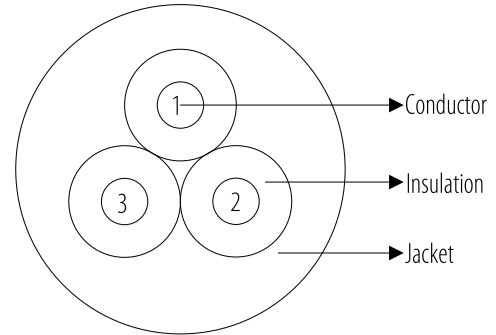

Design Number 10339
Part Number 32134511
Customer Number N/A

Color Code: 1. Black 2. White 3. Green

CONSTRUCTION

Conductor: Stranded bare copper
Conductor Size: 18AWG(41/34)
Insulation: Polyvinyl chloride (PVC)
Insulation Avg. Thickness: 0.015"(Nom.)
Insulation Diameter: 0.087"(Nom.)
Jacket Material: Polyvinyl chloride (PVC), Ribbed
Jacket Avg. Thickness: 0.030"(Nom.)
Overall Diameter: 0.252"(Nom.)
Jacket Color: Brown

Print Legend:

ASCENT E486041 IH (UL) SVT VW-1 105°C 300V 3/C 0.823 mm² (18AWG) c(UL)
SVT FT2 105°C 300V 3/C 18 AWG (0.823 mm²)

ELECTRICAL CHARACTERISTICS

Operating Temperature (°C): 105°C
Operating Voltage: 300V
Conductor Resistance @ 25°C: 22.8 Ω/km Max
Flame Test : UL VW-1 and CSA FT2

SAFETY CHARACTERISTICS

RoHS Compliance: European Directive 2015/863/EU
Approvals: UL, the basic standard is UL 62 "Flexible Cords and Cables"
c(UL) approved to meet CSA standard C22.2, flexible cords

Application: In accordance with Article 400 of the NEC, applications include vacuum cleaners, household food appliances, home entertainment appliances, and power cords for light-duty equipment

All trademarks are property of their respective owners. All specifications are subject to change.

Revision History		
00	2020/07/08	Initial release
Created L. Jian	Approved A. Huang	

Bristol | Unit 61, Gazelle Rd., Weston Industrial Estate, Weston-super-Mare, North Somerset BS24 9ES UK
Frankfurt | Rudolf-Braas-Strasse 2, D-61381 Friedrichsdorf
Milwaukee | 5001 South Towne Dr. New Berlin, WI 53151 USA
Suzhou | B2-2 Weiting Town Industrial - Workshop A, No. 9 Weixin Rd., Suzhou Industrial Park. Jiangsu, China 215122

