



Hueson Wire
 134 Ferry St.
 South Grafton, MA 01560
 www.huesonwire.com

Issue Date: 5/7/2021

Issue: 1


Construction

Description: 6/C 18 16/30 TC XLP/PVC		Diam. (In)
Component:	6 Conductors	
Conductor:	18 AWG 16/30 Tinned Copper to ASTM B-174	0.047 "
Insulation:	0.023" XLPE to SAE J-1128	0.093 "
Color Code:	Black - Green - White - Red - Violet - Orange	0.093 "
Cable Assembly:	Bunch Cable 6 Conductors	0.279 "
Separator:	Non-woven at Cabling	0.283 "
Jacket:	0.036" Flexible PVC, Oil, Moisture UV Resistant, VW-1	0.355 "
Jacket Color:	Black Pressure Extruded 0.355 +/- 0.05"	0.355 "
Put-ups:	2,500' Preferred Spool Size: 24" x 12" Wood	
Print:	18 AWG 6C SAE J1128 "ROHS II" REACH MADE IN USA	

Specifications:	<u>AWM</u>	<u>Temp</u>	<u>Voltage</u>	<u>Flame</u>
UL	SAE	105°C	300V	VW-1
Canadian cRU				

Environmental Compliance

- RoHS EU Directive 2011/65/EU (1&2&3)
- REACH Regulation 210:
- California Prop 65:

 This product may contain chemicals known to the state of California to cause cancer. For more information go to www.P65Warnings.ca.gov


IQ-21196



Hueson Wire
134 Ferry St.
South Grafton, MA 01560
www.huesonwire.com

Issue Date: 5/7/2021
Issue: 1

Drawing/Rotation:

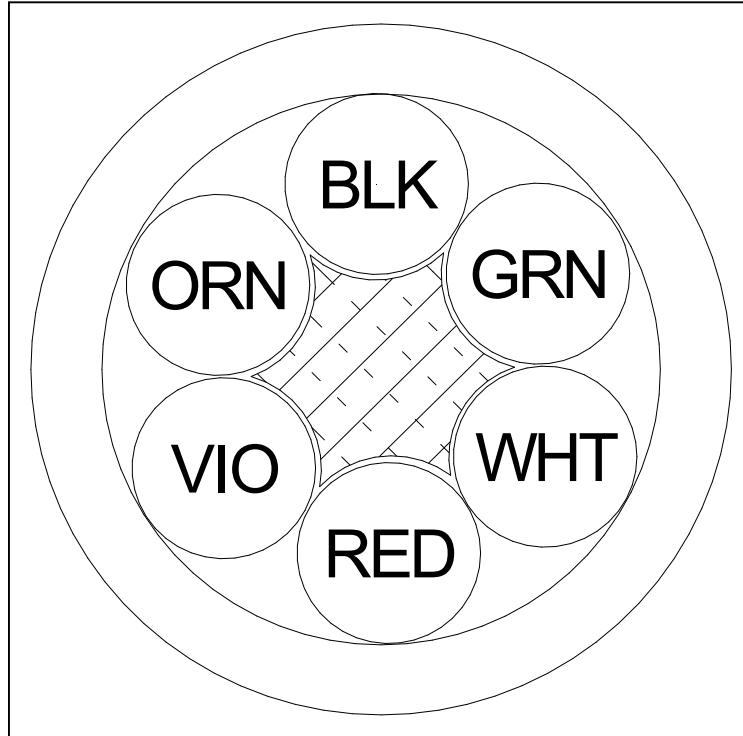

Customer Approval

Drawn By: Brian H

Signature: _____

Date: 5/7/21

Subject to HWC Terms & Conditions

IQ-21196