


SKINDICHT® SM/SM-M Locknuts

Nickel-Plated Brass Locknuts for NPT, PG & Metric Strain Relief Cable Glands

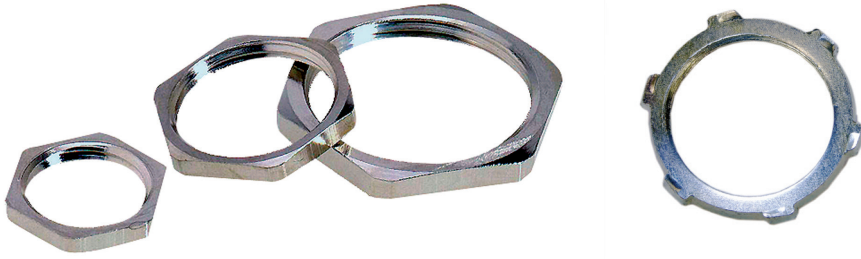

SKINDICHT® SM locknuts are required wherever NPT, PG or metric cable glands must be fastened to a housing, and tapped holes cannot be provided.

■ Approvals



■ Technical Data

Material:

- NPT: Stamped steel
- PG & metric: Nickel-plated brass

Part Number	Thread Type & Size	Wrenching Flats	Nut Thickness (in)	Standard Pack Size
SKINDICHT® SM: NPT				
811092*	NPT 3/8"	0.945	0.138	100
811093	NPT 1/2"	1.102	0.157	100
811094	NPT 3/4"	1.378	0.157	50
811095	NPT 1"	1.693	0.157	50
SKINDICHT® SM: PG				
52003490	PG 7	0.591	0.110	100
52003500	PG 9	0.709	0.110	100
52003510	PG 11	0.827	0.118	100
52003520	PG 13	0.906	0.118	100
52003530	PG 16	1.024	0.118	100
52003540	PG 21	1.260	0.137	50
52003550	PG 29	1.614	0.157	50
52003560	PG 36	2.009	0.197	25
52003570	PG 42	2.364	0.197	25
52003580	PG 48	2.521	0.216	25
SKINDICHT® SM-M: Metric				
52103000	M12 x 1.5	0.591	0.118	100
52103010	M16 x 1.5	0.748	0.118	100
52103020	M20 x 1.5	0.945	0.138	100
52103030	M25 x 1.5	1.182	0.157	100
52103040	M32 x 1.5	1.418	0.157	100
52103050	M40 x 1.5	1.812	0.197	50
52103060	M50 x 1.5	2.364	0.197	50
52103070	M63 x 1.5	2.758	0.197	25
52103071	M75 x 1.5	3.349	0.315	5
52103072	M90 x 2.0	4.018	0.394	1
52103073	M110 x 2.0	4.885	0.472	1

*Product features a hex design.

Photographs are not to scale and are not true representations of the products in question.

If not otherwise specified, all values relating to the product are nominal values. For current information go to our website.

SKINDICHT® SM-PE/SM-PE-M Locknuts

Nickel-Plated Brass Grounding Locknuts for PG & Metric Strain Relief Cable Glands




SKINDICHT® SM-PE locknuts are required wherever varnished, anodized, and powder-coated housings are used. When the locknut is tightened, the raised edges cut through the insulating layer, guaranteeing optimum contact. Ideal for use with SKINTOP® MS-SC or SKINTOP® BRUSH grounding cable glands.

Approvals



Technical Data

 **Material:** Nickel-plated brass

Part Number	Thread Type & Size	Wrenching Flats	Nut Thickness (in)	Standard Pack Size
SKINDICHT® SM-PE: PG				
52103200	PG 7	0.591	0.185	100
52103210	PG 9	0.709	0.185	100
52103220	PG 11	0.827	0.185	100
52103230	PG 13	0.906	0.185	100
52103240	PG 16	1.024	0.185	100
52103250	PG 21	1.260	0.204	50
52103260	PG 29	1.615	0.224	50
52103270	PG 36	2.009	0.263	50
SKINDICHT® SM-PE-M: Metric				
52103300	M12 x 1.5	0.591	0.137	100
52103310	M16 x 1.5	0.748	0.137	100
52103320	M20 x 1.5	0.945	0.145	100
52103330	M25 x 1.5	1.182	0.165	50
52103340	M32 x 1.5	1.418	0.185	50
52103350	M40 x 1.5	1.812	0.216	25
52103360	M50 x 1.5	2.364	0.216	10
52103370	M63 x 1.5	2.758	0.275	10
52103371	M75 x 1.5	3.349	0.315	5
52103372	M90 x 2.0	4.018	0.394	1
52103373	M110 x 2.0	4.885	0.472	1

Photographs are not to scale and are not true representations of the products in question.
If not otherwise specified, all values relating to the product are nominal values. For current information go to our website.