


70080NH

**Low Loss Serial Digital Video coax
75Ohm bonded-Al-foil Cu FRNC HDTV
Duobond II 80% TC Braid**

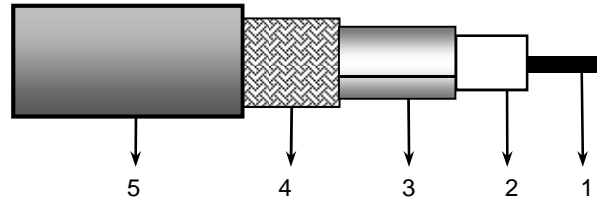

Applications

- Low loss HDTV/SDI Digital coax used in analog and digital video circuits and high quality applications.
- The cable is UV-resistant and suitable for indoor and outdoor use.
- Use of 1080p/50 applications

General Standards

- SDTV/HDTV serial digital standard compliant
- European standard EN 50117-1
- European standard EN 50290-2-20

Construction & Dimensions

1. Inner conductor	
Material	bare copper
Diameter	0.65 ± 0.02 mm (AWG22)
2. Dielectric	
Material	gas injected PE
Diameter	2.90 ± 0.15 mm
3. Foil	
Material	AL-PET-AL bonded to dielectric
Overlap	≥ 2 mm
4. Braid	
Material	Tinned copper
Coverage	80 ± 5 %
Nominal diameter	3.45 mm
5. Jacket	
Material	FRNC/LSNH
Diameter	4.45 mm ± 0.2 mm

Mechanical characteristics

Parameter	Specification	Unit
Tensile strength	≥ 9.0	N/mm ²
Elongation at break	≥ 125	%
Maximum tensile strength of cable	160	N
Minimum static bend radius	45	mm

Electrical characteristics

Parameter	Specification	Unit
Mean characteristic impedance	75 ± 3	Ω
Nominal DC resistance inner conductor	55	Ω/km
Nominal DC resistance outer conductor	20	Ω/km
Capacitance	53	pF/m
Velocity of propagation	84	%
Nominal delay	4	ns/m
Insulation resistance	> 104	MΩ.km
Dielectric strength	2	kVdc
Return loss at		
	5-1600 MHz	23
	1600-4500 MHz	21

Attenuation at:	Nominal	Unit
1 MHz:	1.7	dB/100m
3.6 MHz:	2.5	dB/100m
10 MHz:	3.7	dB/100m
71.5 MHz:	8.6	dB/100m
135 MHz:	11.5	dB/100m
270 MHz:	16.1	dB/100m
360 MHz:	18.6	dB/100m
540 MHz:	22.8	dB/100m

Attenuation at:	Nominal	Unit
720 MHz:	26.4	dB/100m
750 MHz:	26.9	dB/100m
1000 MHz:	31.3	dB/100m
1500 MHz:	38.7	dB/100m
2250 MHz:	48.0	dB/100m
3000 MHz:	56.1	dB/100m
4000 MHz:	65.7	dB/100m
4500 MHz:	70.2	dB/100m

Maximum attenuation is 10 % higher.

Environmental and overall characteristics

Parameter	Specification	Unit
Storage/operating temperature	-30 to +70	°C
Minimum installation temperature	-5	°C
Smoke density acc. to IEC 61034-1/2 & EN50268-1/2; transmittance	> 60	%
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; pH	> 4.3	
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2;	< 10	µS/mm
Resistance to flame propagation according IEC 60332-1	Pass	

Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

