
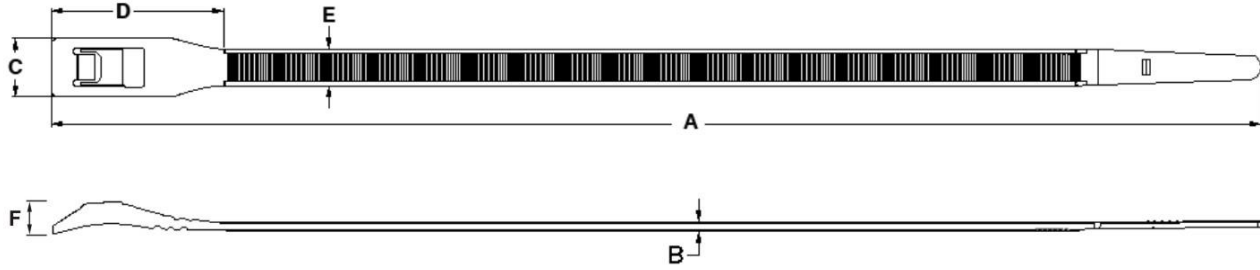



ADVANCED CABLE TIES PART NUMBER			BUNDLE DIAMETER		A IN (mm) +/- .030 (.762mm)	B IN (mm) +/- .005 (.127mm)	C IN (mm) +/- .020 (.508mm)	D IN (mm) +/- .020 (.508mm)	E IN (mm) +/- .030 (.762mm)	F IN (mm) +/- .005 (.127mm)	MIN LOOP TENSILE LBS (n)	ANSI/UL 94 MH FLAMABILITY RATING	PLENUM RATING		
			MIN IN (mm)	MAX IN (mm)											
AP(R, L)-07-50-LP-9			.3750 (9.525mm)	1.7500 (44.450mm)	7.500 (190.5mm)	.053 (1.346mm)	.337 (8.559mm)	.690 (17.526mm)	.176 (4.470mm)	.164 (4.200mm)	50 (222)	V-2	AH-2		
AP(R, L)-07-50-LP-0			.3750 (9.525mm)	1.7500 (44.450mm)	7.500 (190.5mm)	.053 (1.346mm)	.337 (8.559mm)	.690 (17.526mm)	.176 (4.470mm)	.164 (4.200mm)	50 (222)	V-2	AH-2		
AP(R, L)-11-50-LP-9			.3750 (9.525mm)	3.0625 (77.787mm)	11.350 (288.290mm)	.053 (1.346mm)	.337 (8.559mm)	.690 (17.526mm)	.176 (4.470mm)	.164 (4.200mm)	50 (222)	V-2	AH-2		
AP(R, L)-11-50-LP-0			.3750 (9.525mm)	3.0625 (77.787mm)	11.350 (288.290mm)	.053 (1.346mm)	.337 (8.559mm)	.690 (17.526mm)	.176 (4.470mm)	.164 (4.200mm)	50 (222)	V-2	AH-2		
AP(R, L)-14-50-LP-9			.3750 (9.525mm)	4.0625 (103.187mm)	14.650 (372.110)	.053 (1.346mm)	.337 (8.559mm)	.690 (17.526mm)	.176 (4.470mm)	.164 (4.200mm)	50 (222)	V-2	AH-2		
AP(R, L)-14-50-LP-0			.3750 (9.525mm)	4.0625 (103.187mm)	14.650 (372.110)	.053 (1.346mm)	.337 (8.559mm)	.690 (17.526mm)	.176 (4.470mm)	.164 (4.200mm)	50 (222)	V-2	AH-2		
															
ADVANCED CABLE TIES – 50 LB. (222n) STANDARD SERIES LOW PROFILE CABLE TIES															
										COLOR DESIGNATIONS:		MATERIAL:			
										0 = UV BLACK 9 = NATURAL		NYLON 6/6 POLYAMIDE			
						SHEET 1 OF 1		REV.: A		DRAWING NO.: LP-A					
A	10/15/14	JA	KT	KT	INITIAL RELEASE			DRAWN BY		DATE		CHECK		SCALE	
REV	DATE	BY	CHK	APPROVE	DESCRIPTION			JA		10/15/14		KT		NONE	
CONFIDENTIAL PROPERTY OF ADVANCED CABLE TIES, INC. THIS DRAWING IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF ADVANCED CABLE TIES, INC.															



ADVANCED CABLE TIES PART NUMBER	BUNDLE DIAMETER		A IN (mm) +/- .030 (.762mm)	B IN (mm) +/- .005 (.127mm)	C IN (mm) +/- .020 (.508mm)	D IN (mm) +/- .020 (.508mm)	E IN (mm) +/- .030 (.762mm)	F IN (mm) +/- .005 (.127mm)	MIN LOOP TENSILE LBS (n)	ANSI/UL 94 MH FLAMABILITY RATING	PLENUM RATING	
	MIN IN (mm)	MAX IN (mm)										
AP(R, L)-14-120-LP-9	.562 (14.287mm)	4.062 (103.174mm)	16.000 (406.400mm)	.075 (1.905mm)	.487 (12.369mm)	1.450 (36.900mm)	.296 (7.530mm)	.238 (6.040mm)	120 (534)	V-2	AH-2	
AP(R, L)-14-120-LP-0	.562 (14.287mm)	4.062 (103.174mm)	16.000 (406.400mm)	.075 (1.905mm)	.487 (12.369mm)	1.450 (36.900mm)	.296 (7.530mm)	.238 (6.040mm)	120 (534)	V-2	AH-2	
AP(R, L)-14-120-LP-30	.562 (14.287mm)	4.062 (103.174mm)	16.000 (406.400mm)	.075 (1.905mm)	.487 (12.369mm)	1.450 (36.900mm)	.296 (7.530mm)	.238 (6.040mm)	120 (534)	V-2	N/A	
												
						ADVANCED CABLE TIES – 120 LB. (534n) HEAVY DUTY SERIES LOW PROFILE CABLE TIES						
						COLOR DESIGNATIONS: 0 = UV BLACK 9 = NATURAL 30 = HEAT STABILIZED			MATERIAL: NYLON 6/6 POLYAMIDE			
						SHEET 1 OF 1		REV.: A		DRAWING NO.: HD-LP-A		
A	4/15/14	JA	KT	KT	INITIAL RELEASE		DRAWN BY		DATE		CHECK	SCALE
REV	DATE	BY	CHK	APPROVE	DESCRIPTION		JA		4/15/2014		KT	NONE

CONFIDENTIAL PROPERTY OF ADVANCED CABLE TIES, INC.

THIS DRAWING IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF ADVANCED CABLE TIES, INC.

SPC-4.10.86.1