



All rights reserved. Passing on and copying of this document, use and communication of its contents not permitted without written authorization of LEMO  
 未经LEMO许可, 不得擅自复制或发布

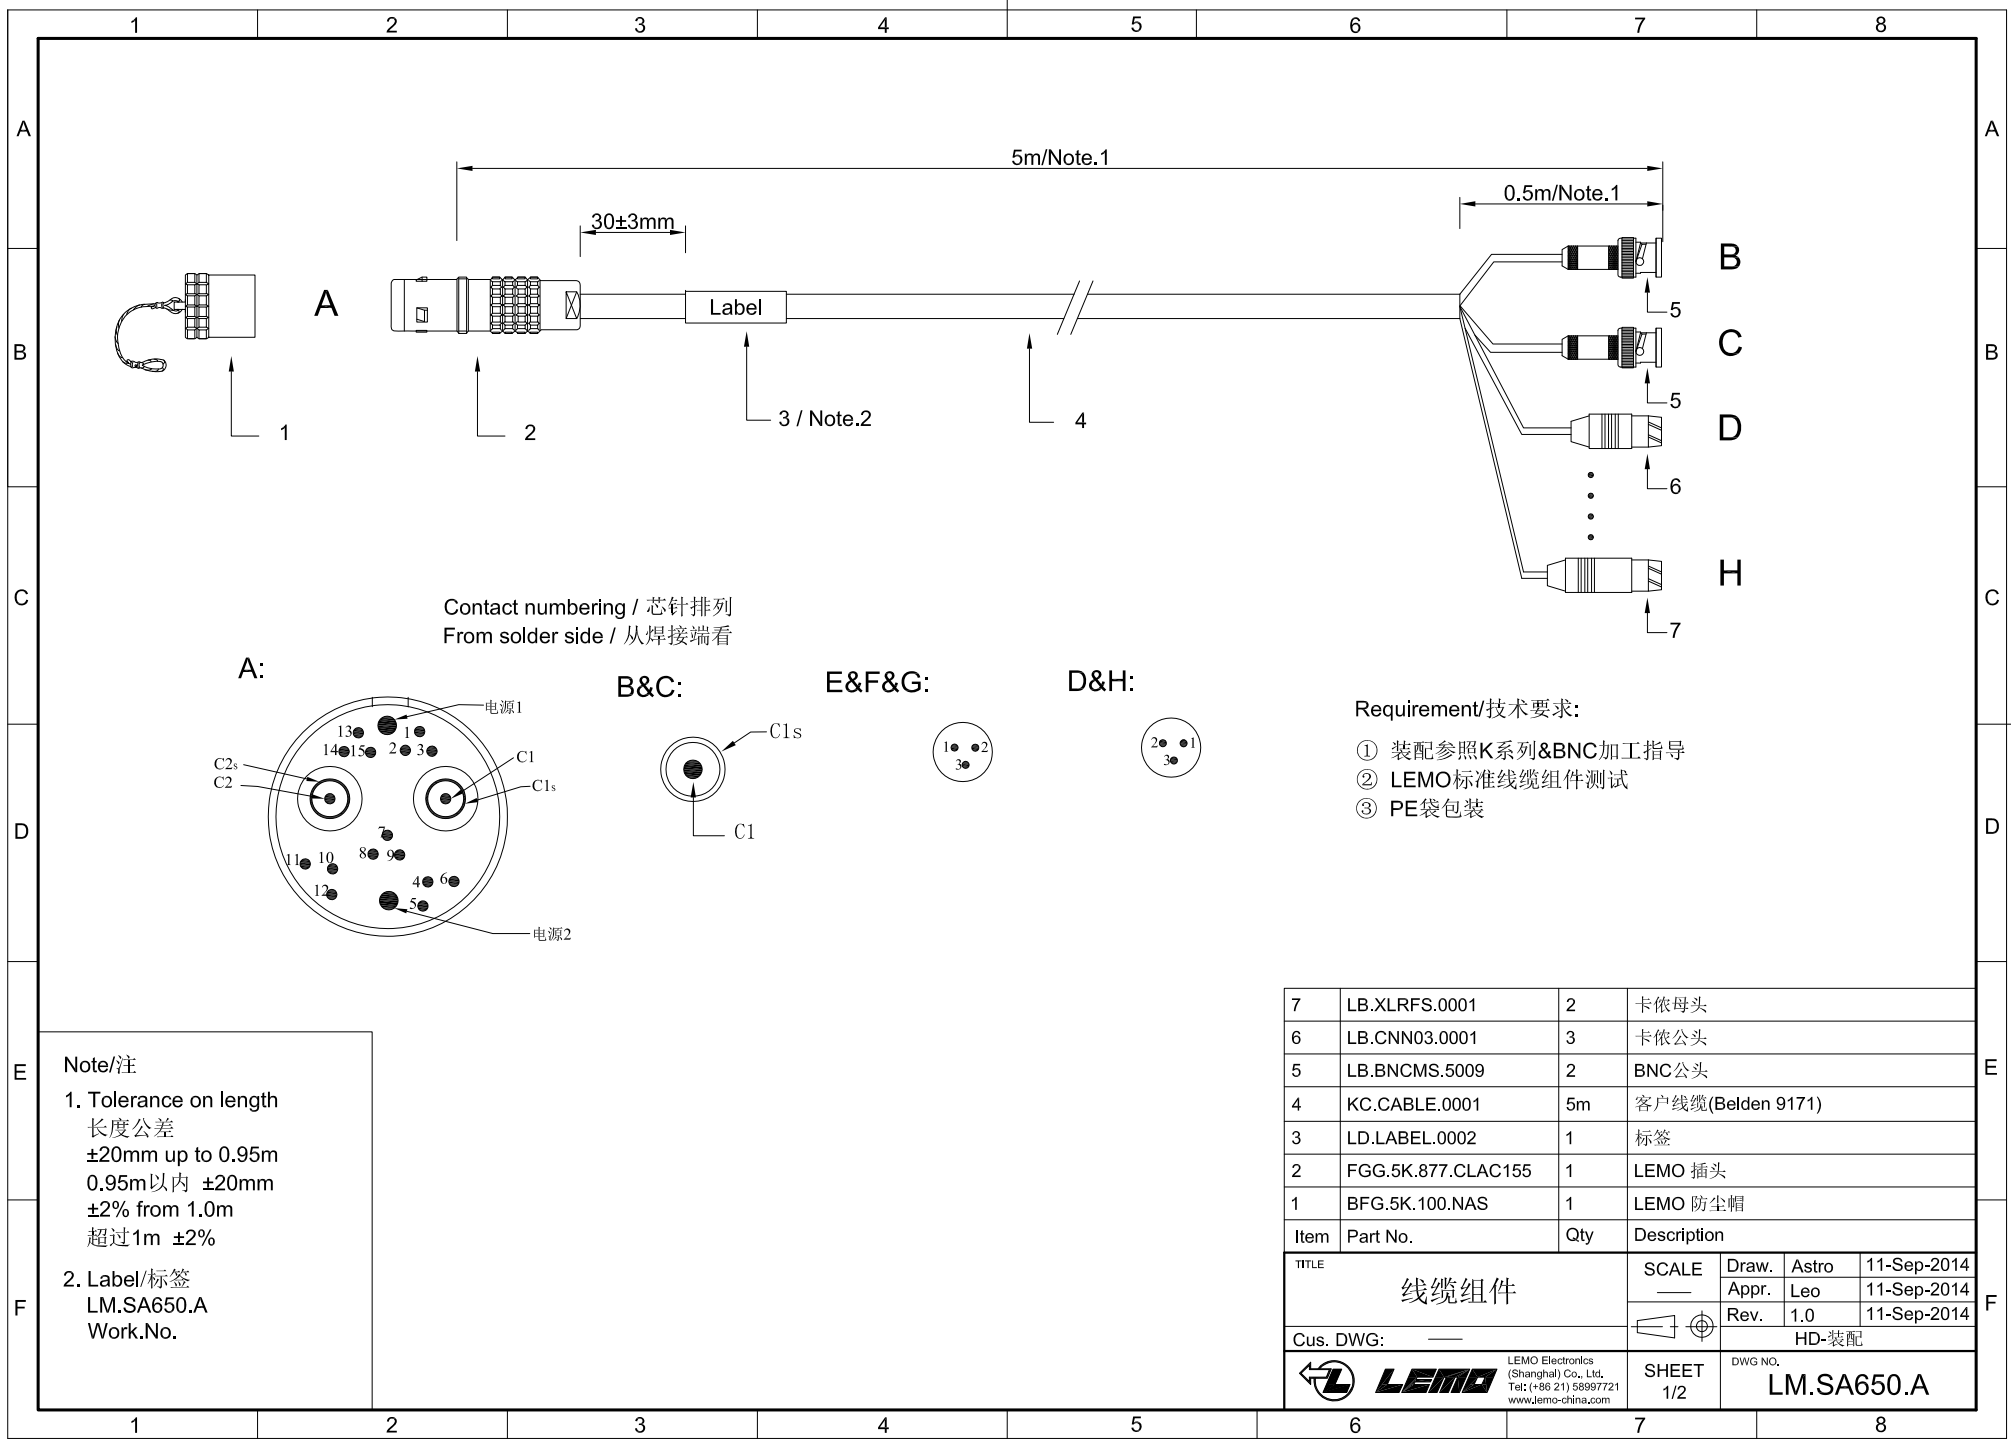

Contact numbering / 芯针排列  
 From solder side / 从焊接端看

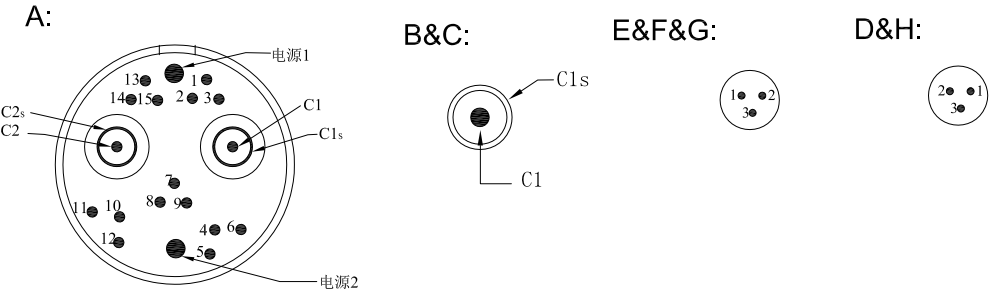

Requirement/技术要求:

- ① 装配参照K系列&BNC加工指导
- ② LEMO标准线缆组件测试
- ③ PE袋包装

**Note/注**  
 1. Tolerance on length  
 长度公差  
 ±20mm up to 0.95m  
 0.95m以内 ±20mm  
 ±2% from 1.0m  
 超过1m ±2%  
 2. Label/标签  
 LM.SA650.A  
 Work.No.

7	LB.XLRFS.0001	2	卡侬母头
6	LB.CNN03.0001	3	卡侬公头
5	LB.BNCMS.5009	2	BNC公头
4	KC.CABLE.0001	5m	客户线缆(Belden 9171)
3	LD.LABEL.0002	1	标签
2	FGG.5K.877.CLAC155	1	LEMO 插头
1	BFG.5K.100.NAS	1	LEMO 防尘帽
Item	Part No.	Qty	Description
TITLE			SCALE
线缆组件			Draw. Astro 11-Sep-2014
			Appr. Leo 11-Sep-2014
Rev. 1.0 11-Sep-2014			HD-装配
SHEET 1/2			DWG NO. LM.SA650.A
Cus. DWG: — LEMO Electronics (Shanghai) Co., Ltd. Tel: (+86 21) 58997721 www.lemo-china.com			

Connection Designation / 接线表			
EGG.5K.877插座	芯线颜色		
C1	同轴1 芯	C1	BNC (B)
C1s	同轴1 网	C1s	
C2	同轴2 芯	C2	BNC (C)
C2s	同轴2 网	C2s	
1	地线	1	卡依头D (母头)
2	黄	2	
3	黑	3	
4	地线	1	卡依头E (公头)
5	红	2	
6	黑	3	
7	地线	1	卡依头F (公头)
8	白	2	
9	黑	3	
10	地线	1	卡依头G (公头)
11	蓝	2	
12	黑	3	
13	地线	1	卡依头H (母头)
14	绿	2	
15	黑	3	
电源1	紫		
电源2	橙		
外壳	屏蔽网		

TITLE		SCALE		DRAW.	
线缆组件		—		Astro 11-Sep-2014	
Cus. DWG: —		SHEET 2/2		Appr. Leo 11-Sep-2014	
LEMO Electronics (Shanghai) Co., Ltd. Tel: (+86 21) 59897721 www.lemo-china.com		HD-装配		Rev. 1.0 11-Sep-2014	
DWG NO.		LM.SA650.A			

