

Circuit Board Materials

BradyID.com



B-719 Electrostatic Dissipative Polyimide Material

Color: White Finish: Matte

High temperature, low profile white polyimide material (1 mil) with a permanent static dissipative adhesive and static dissipative release liner. Similar to B-718, but with a matte topcoat, which prevents solder balls from sticking after molten wave solder exposure. Surface resistivity values in the recommended range for Dissipative ESD packaging materials. Also meets requirements of EIA-541 "Packaging Material Standards for ESD Sensitive Items."

Performance Attributes:

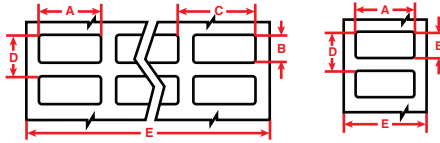


Figure 1

Figure 2



Diagram	Catalog #	Material	Color	Label Width A Inch (mm)	Label Height B Inch (mm)	Horiz. Repeat C Inch (mm)	Vert. Repeat D Inch (mm)	Web Width E Inch (mm)	Labels Per Row	Labels Per Pkg	Rec. Ribbon
Fig. 1	THT-70-719-20	Polyimide	White	0.250 (6.4)	0.250 (6.4)	0.320 (8.1)	0.350 (8.9)	2.370 (60.2)	7	20,000	R6000
Fig. 1	THT-71-719-20	Polyimide	White	0.315 (8.0)	0.315 (8.0)	0.375 (9.5)	0.415 (10.5)	2.390 (60.7)	6	20,000	R6000
Fig. 1	THT-38-719-10	Polyimide	White	0.375 (9.5)	0.375 (9.5)	0.437 (11.1)	0.475 (12.1)	3.200 (81.3)	7	10,000	R6002, R4702
Fig. 1	THT-12-719-10	Polyimide	White	0.500 (12.7)	0.437 (11.1)	0.662 (16.8)	0.537 (13.6)	3.350 (85.1)	5	10,000	R6007, R4707
Fig. 2	THT-99-719-10	Polyimide	White	0.500 (12.7)	0.500 (12.7)	-	0.600 (15.2)	0.700 (17.8)	1	10,000	R6011
Fig. 1	THT-14-719-10	Polyimide	White	0.650 (16.5)	0.200 (5.1)	0.700 (17.8)	0.300 (7.6)	2.950 (74.9)	4	10,000	R6002, R4702
Fig. 2	THT-47-719-10	Polyimide	White	0.650 (16.5)	0.200 (5.1)	-	0.300 (7.6)	0.850 (21.6)	1	10,000	R6011
Fig. 1	THT-1-719-10	Polyimide	White	0.750 (19.1)	0.250 (6.4)	0.800 (20.3)	0.350 (8.9)	3.350 (85.1)	4	10,000	R6007, R4707
Fig. 2	THT-46-719-10	Polyimide	White	0.750 (19.1)	0.250 (6.4)	-	0.350 (8.9)	0.950 (24.1)	1	10,000	R6006, R4706
Fig. 1	THT-2-719-10	Polyimide	White	0.900 (22.9)	0.250 (6.4)	1.125 (28.6)	0.350 (8.9)	3.350 (85.1)	3	10,000	R6007, R4707
Fig. 2	THT-49-719-10	Polyimide	White	0.900 (22.9)	0.250 (6.4)	-	0.350 (8.9)	1.100 (27.9)	1	10,000	R6006, R4706
Fig. 2	THT-103-719-10	Polyimide	White	1.000 (25.4)	0.250 (6.4)	-	0.350 (8.9)	1.200 (30.5)	1	10,000	R6006, R4706
Fig. 1	THT-3-719-10	Polyimide	White	1.000 (25.4)	0.375 (9.5)	1.075 (27.3)	0.475 (12.1)	3.350 (85.1)	3	10,000	R6007, R4707
Fig. 2	THT-42-719-10	Polyimide	White	1.000 (25.4)	0.187 (4.8)	-	0.287 (6.9)	1.200 (30.5)	1	10,000	R6006, R4706
Fig. 1	THT-5-719-10	Polyimide	White	1.000 (25.4)	0.500 (12.7)	1.075 (27.3)	0.600 (15.2)	3.350 (85.1)	3	10,000	R6007, R4707
Fig. 2	THT-58-719-10	Polyimide	White	1.000 (25.4)	0.375 (9.5)	-	0.475 (12.1)	1.200 (30.5)	1	10,000	R6006, R4706
Fig. 2	THT-59-719-10	Polyimide	White	1.000 (25.4)	0.500 (12.7)	-	0.600 (15.2)	1.200 (30.5)	1	10,000	R6006, R4706
Fig. 1	THT-29-719-10	Polyimide	White	1.250 (31.8)	0.375 (9.5)	1.300 (33.0)	0.475 (12.1)	2.750 (69.9)	2	10,000	R6002, R4702
Fig. 2	THT-43-719-10	Polyimide	White	1.250 (31.8)	0.250 (6.4)	-	0.350 (8.9)	1.450 (36.8)	1	10,000	R6006, R4706
Fig. 2	THT-45-719-10	Polyimide	White	1.500 (38.1)	0.250 (6.4)	-	0.350 (8.9)	1.700 (43.2)	1	10,000	R6000
Fig. 2	THT-60-719-10	Polyimide	White	1.500 (38.1)	0.125 (3.2)	-	0.225 (5.7)	1.700 (43.2)	1	10,000	R6000
Fig. 2	THT-48-719-10	Polyimide	White	2.000 (50.8)	0.250 (6.4)	-	0.350 (8.9)	2.200 (55.9)	1	10,000	R6000



Did You Know? Electrostatic Dissipative (ESD) Labels

Brady's electrostatic dissipative labels, or ESD labels, meet the requirements of ANSI/ESD S20.20 standard. ESD labels are designed to protect the static-sensitive components of your circuit boards. since when labels are peeled off of their unique ESD liner, they produce only low static discharge voltage.

Available in a variety of types and sizes, Brady's ESD labels can help you reduce damages from static discharge, and keep your product cost down.

