



RoHS COMPLIANT

DATE	REV.	REVISION	DRAFTING	CHECKED
2012.03.23	A/0	NEW	DHY	
2013.08.26	A/1	ADD UPC Barcode Label	Vinci	

△ Length

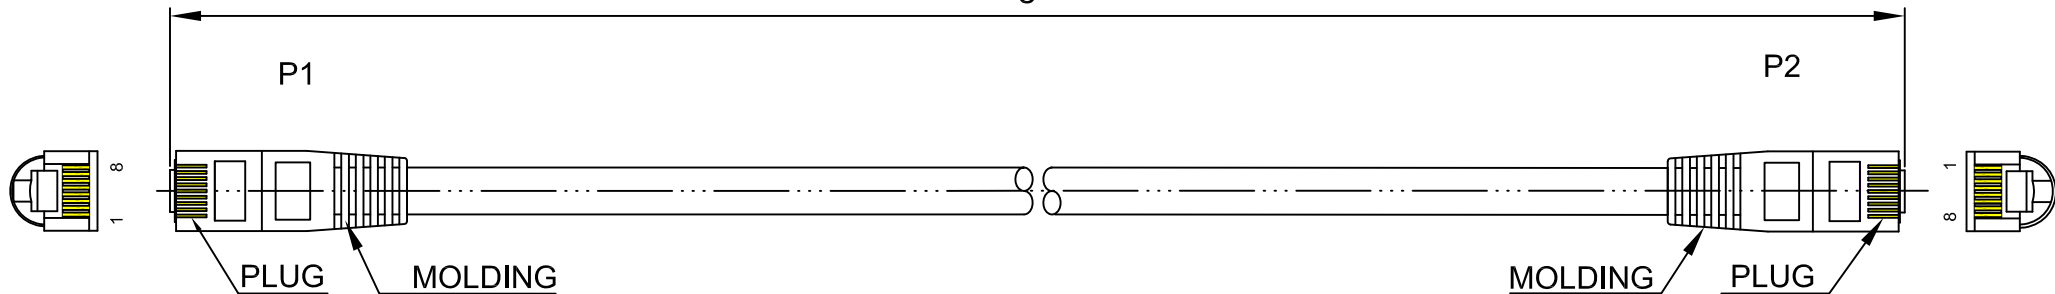

Marking: GrandMax UTP CAT.5E/350MHz PATCH FOR GIGABIT ETHERNET ETL/3P CONFORM TO ANSI/TIA-568-C.2 & (FP0217) ISO/IEC 11801 ED.2 & EN 50288-3-2 & IEC 60332-1-2 ▲ 24AWGX4P CM (UL) c(UL) E164469-XX RoHS

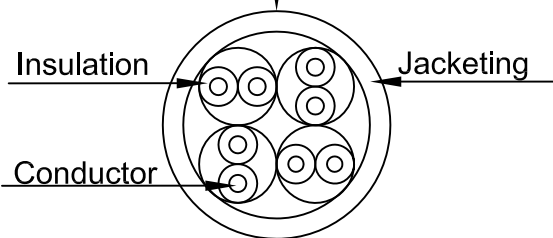

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 24AWG
Insulation	Thickness:MIN at any point:0.15mm MAX AVG:0.25mm Diameter:0.98±0.06mm
Jacket	PVC Thickness:MIN at any point:0.42mm MAX AVG:0.48mm Diameter:5.4±0.2mm
Wire	CAT.5E UTP STR 24AWGX4P
Plug	YU-19 8P8C 50u"
Color	CCC
Length	XXX ft


Unless specified on the drawing, tolerances are per the follows:
 . ± 1
 .X ± 0.2
 .XX ± 0.05



Y.C.CABLE USA(EAST)INC.					
DRAW.NO	L-677	ITEM	C350-XXX-CCC		
DEPARTMENT		DRAW	Vinci	DATE	2013.08.26
SCALE		CHECKER		DATE	
UNIT	mm	SHEET	1 OF 2		



RoHS COMPLIANT

DATE	REV.	REVISION	DRAFTING	CHECKED
2012.03.23	A/0	NEW	DHY	
2013.08.26	A/1	ADD UPC Barcode Label	Vinci	
2018.08.17	A/2	Revised carton label position and added Prop 65 label into PE bag	LHY	

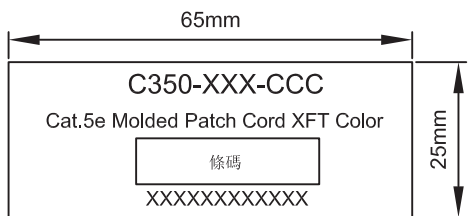

UPC Label

Length(ft)	PCS/CTN
1	300
2	250
3	200
5	150
7	120
8	110
10	80
15	60
25	40
50	20
75	15
100	12

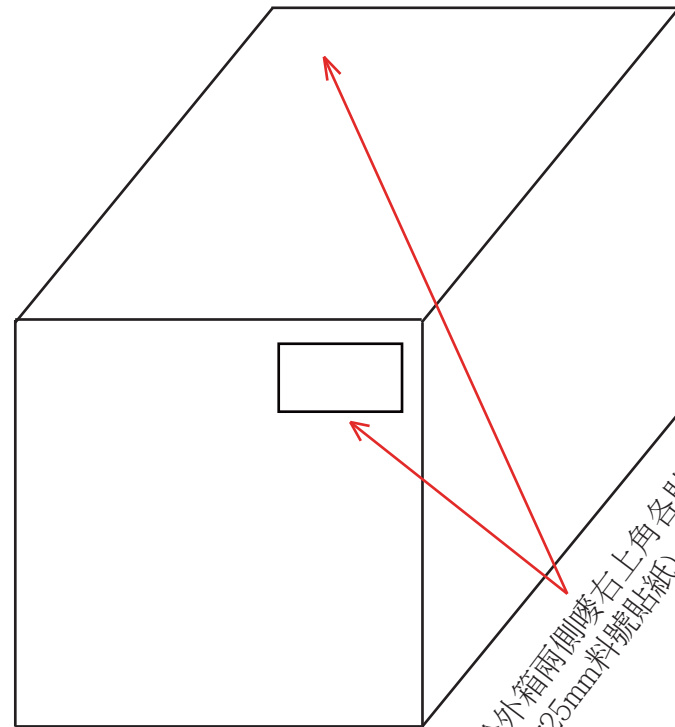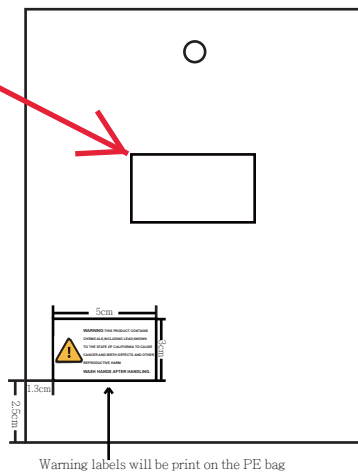

於外箱兩側膠右上角各貼一張
(65*25mm料號貼紙)

APPROVED *Tony*
By Tony Hsu at 11:34 am, Aug 22, 2018

Unless specified on the drawing, tolerances are per the follows:
 . ± 1
 .X ± 0.2
 .XX ± 0.05

3RD

Y.C.CABLE USA(EAST)INC.				
DRAW.NO	L-677	ITEM	C350-XXX-CCC	
DEPARTMENT		DRAW	工程圖	DATE 2013.08.26
SCALE		CHECKER	2018.08.16	DATE
UNIT	mm	SHEET	鍾曙光	2 OF 2