


DGC DATA GUIDE CABLE

SPECIALTY & CUSTOM CABLES

232 Sherman Street Gardner, MA 01440
 Phone: 978-632-0900 Fax: 978-630-1872
 Visit us on our website; www.dataguidecable.com

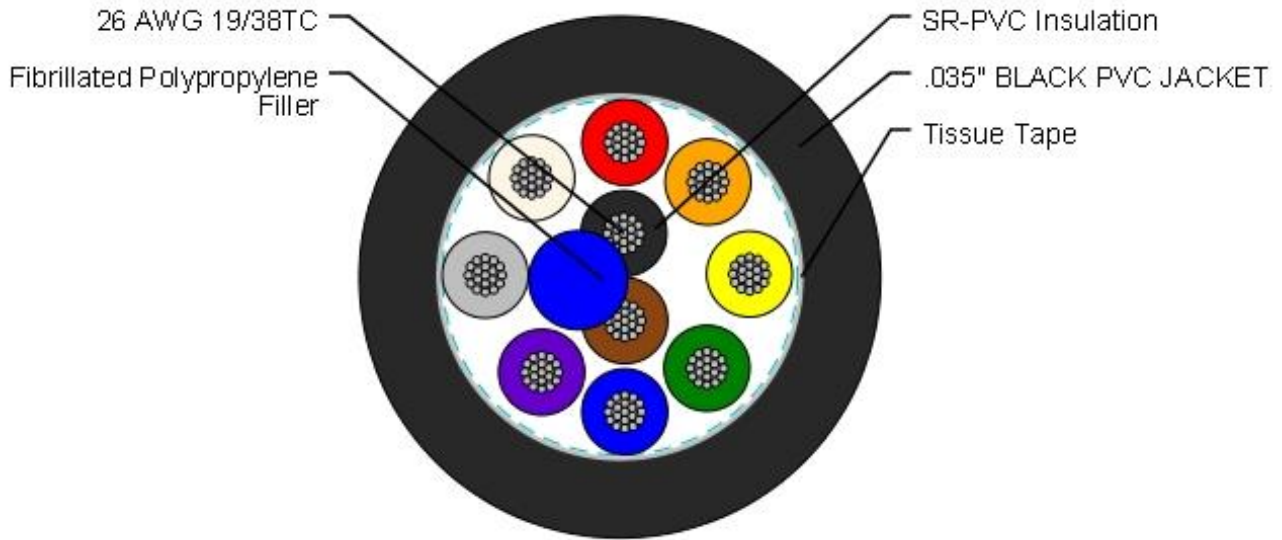

10 CONDUCTOR Control CABLE Tissue Binder Tape AND PVC JACKET

LISTING / AGENCY APPROVAL

UL AWM STYLE 2464 80C 300V
 CSA AWM II A 80C 300V FT1

COMPONENT A
CONDUCTORS (10 total):
 26 AWG 19/38 Tinned Copper Insulated with 0.010" Nominal Wall of Semi-Rigid PVC to a Nominal O.D. of 0.039"

COLORS:
 Black, Brown, Red, Orange, Yellow, Green, Blue, Purple, Gray, White

FINAL CABLING:
 Filler: Flame Retardant Fibrillated Polypropylene
 Component A Cabled Together
 Binder: Tissue Tape, 25% Overlap

FINAL JACKET:
 Material: PVC
 Color: Black
 Wall Thickness: 0.035"
 Finished Cable Diameter: 0.230" (0.220" MIN, 0.240" MAX)
 Surface Print: "E90298 RU AWM STYLE 2464 80C 300V – LL91737 CSA AWM II A 80C 300V FT1"

REVISION HISTORY

0	12-04-2023	RMB	First Issue
---	------------	-----	-------------

Customer Number	2610C-0DGE
D.G. Part Number	94J29-3
Prepared By: RMB	
Reviewed By: CMA	

CUSTOMER APPROVAL (AS APPLICABLE)

Title: _____

Date: _____