


GeneralCable
UL STYLE 3271 #18AWG

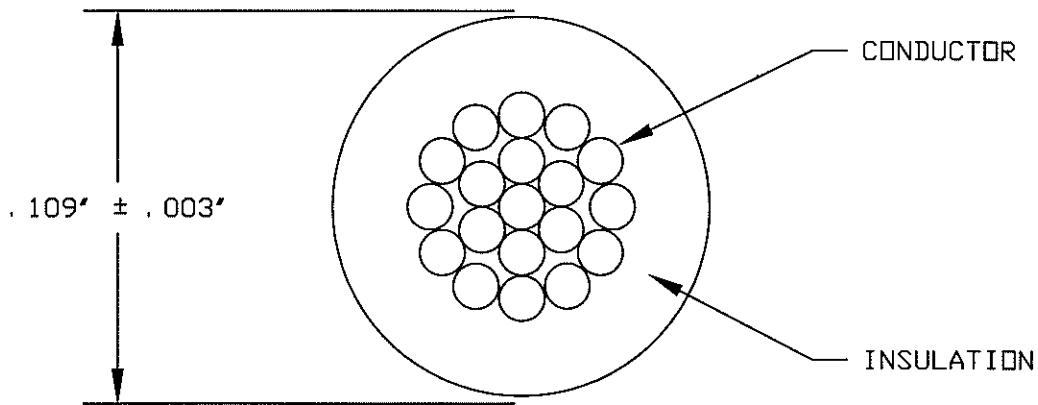

MATERIAL

CONDUCTOR: #18AWG 19/30 TINNED COPPER
INSULATION: XLPE -.031' NOMINAL WALL
DIAMETER: .109' NOMINAL

REQUIREMENTS

CONDUCTOR DIAMETER: 0.0475'
UL: STYLE 3271 125°C
CSA: AWM 125°C
VOLTAGE RATING: 600V
WEIGHT: 11 LBS/1000 FT

GeneralCable PART NUMBER

207010

PRINT

*68A9378P18 125C 600V 18AWG 19STRD STYLE 3271 9J AWM GENERAL CABLE
BRAND REX BRAND (WC) XP183119-166-GE/CSA AWM IA 125C 600V
FT1/IAM MIL-W-16878/16*

APPLICABLE SPECIFICATIONS

UL: STANDARD 758
CSA: CSA STANDARD C22.2 NO. 210.2
MIL: MIL-W-16878/16

REVISIONS	0	01/31/06	FIRST ISSUE	<p>GeneralCable 1600 West Main Street, Willimantic, CT 06226-1128 <u>The Power of One</u></p>			
				DRAWING NO: 12-1656			
REFERENCES	IEWC/GE 68A9378P18			DRAWN BY: W. DRABEK		APPROVED BY: M. LAJEUNESSE	
	GeneralCable PART #207010			THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable			
	XP183119-166-GE						