

PRODUCT SPECIFICATION

DATE	REV	ECN	DESCRIPTION
6/2003 A 103			

Parent Number: FRC015-C

Description: 16/2 19/29 BC GPT RIP CORD 105C

Stranding: 19/29 BC LHL

Style: GPT per SAE J1128 Rip Cord

Insulation: PVC

Print Legend: NO PRINT

Temperature: 105C

Voltage: Per SAE J 1128 this product is intended for use at a nominal system voltage of 60 Volts DC or less in surface vehicle electrical systems.

Notes:

This product complies with European Directive 2002/95/EC (RoHS)


The information presented here is, to the best of our knowledge, true and accurate. Since conditions of use are beyond Coleman Cable's control all product data presented is for informational purposes only and does not create a binding obligation or liability on Coleman Cable or confer any rights on any customer. The sale of product(s) is conditioned upon acceptance of a purchase order subject to Coleman Cable's standard terms and conditions contained therein, including without limitation Coleman Cable's standard warranty. Coleman cable disclaims all liability in connection with the use of information contained herein or otherwise.

This specification is proprietary intellectual property of Coleman Cable. Any information contained herein shall not be disclosed to any party without written consent of Coleman Cable.

Customer Approval:

Approved By: _____ **Date:** _____

Title: _____ **Company Name:** _____

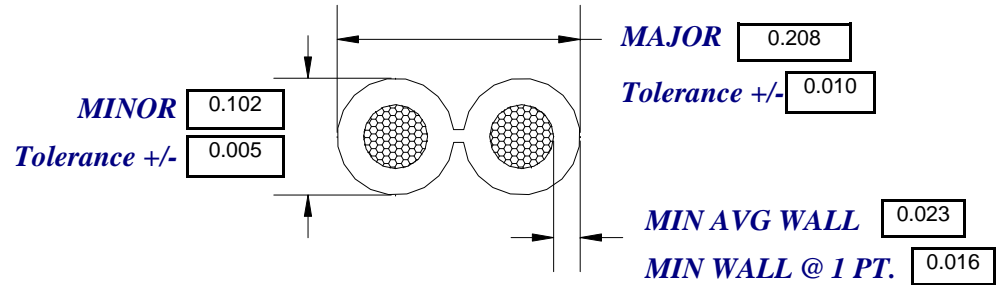

COLEMAN CABLE

1530 Shields Drive
Waukegan, IL 60085

Phone: 800-323-9355

www.colemancable.com

