



SAYLOR CLASSIC

SAYLOR CLASSIC
NON-METALLIC FLEXIBLE CONDUIT

Saylor CLASSIC — a Non-Metallic Flexible Conduit - is woven from the highest grade yarns and fibers an application requires. Standard products are a blend of Poly Fiber, Paper, and an Asphaltic Resin.

APPLICATIONS

- Wire Harness
Fuel and Vacuum Lines
Battery Cables
Mold Duct
Oil Indicators
Control Rods
EGR Tubes
Many Others

TYPICAL PROPERTIES

- Shock Absorbent
Oil and Fuel Resistant
Completely Flexible
Dimensionally Stable
Sound Absorbent
Fire and Water Resistant
Temperature Insensitive
Impervious to Hostile Environment

SPECIFICATIONS


- HH-T-791 A,B,C
SAE J562A
ESB-M3L38-A
ESF-M3L45-A
ESB-M99H96
MS-542
MSJZ9-31
GM-675, 676, 677, 678M

MATERIAL DESCRIPTION

Table with 3 columns: Test Data, Actual Measured, Specification. Rows include Normal Operating Temp., Picks per inch, Fill Ends, Warp Ends, Fill Construction, Fiber Construction, Dimensions - I.D. - Inch, Total Weight, LOOM weight, Asphalt Resin weight, Shrinkage, Breaking Strength, Abrasion Resistance.

AVAILABILITY

- Range of Sizes: 1/8" thru 1-1/2" I.D.
Cut to Length and Slit product - Can be produced in multiple colors
* This Data Sheet to be used as reference and is not intended to be used as a basis for production specification.
Made in the USA

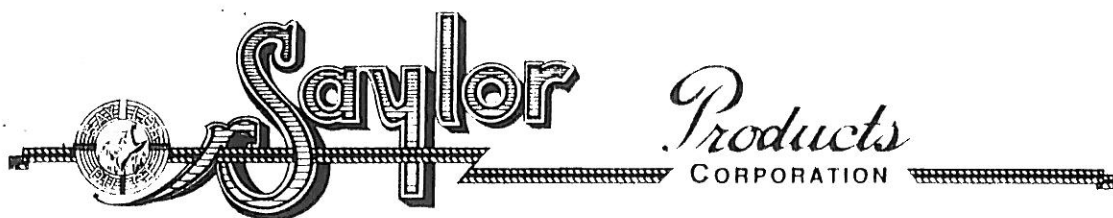

17484 SAYLOR LANE

GRAND RAPIDS, OHIO 43522

MATERIAL SAFETY DATA SHEET

PRODUCT - NON-METALLIC CONDUIT - ASPHALT COATED

INGREDIENTS - 59% COTTON OR RAYON
35% PAPER
6% ASPHALT COVERING

HEALTH HAZARD - NONE

CONDITIONS TO AVOID - NONE


STABILITY - STABLE

WASTE DISPOSAL - INCINERATE

SPECIAL PROTECTION - GLOVES

313-253-0033

FAX 313-253-0036

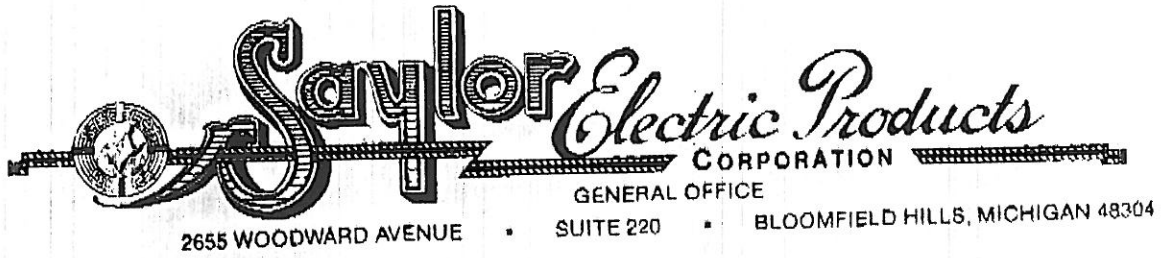

OUR LOOM HAS BEEN TESTED AS FOLLOWS:

-05°F DOES NOT TURN BRITTLE OR CRACK.

220-230°F BEFORE MELTING

WE MEET FORD, GM & CHRYSLER SPECS. - ESB-M3L38-A, GM 675-M,
MS-542.

WE MEET MILITARY SPEC HH-T-791 C PER ONE EXCEPTION.

LOOM SPECIFICATIONS WHICH OUR LOOM MEETS

FORD MOTOR COMPANY

ESB-M3L38-A

ASPHALTUM LOOM

ESF-M3L45-A

ASPHALTUM LOOM - FOR BATTERY CABLES

ESB-M99H96-A

OILED ANTI RATTLE - DOOR LOCK REMOTE
REMOTE CONTROL LINK

CHRYSLER

MS-542

ASPHALTUM LOOM

MS-JZ9-31

OILED ANTI-RATTLE-SLEEVE DR LOCK REMOTE
CONTROL LINK

GENERAL MOTORS

GM 675-M

GENERAL PURPOSE LOOM

GM 678-M

ANTI RATTLE LOOM

MILITARY SPEC.

HH-T-791A, B, C,

ASPHALTUM LOOM