


GeneralCable
 CROSSED-LINKED POLYETHYLENE #18AWG

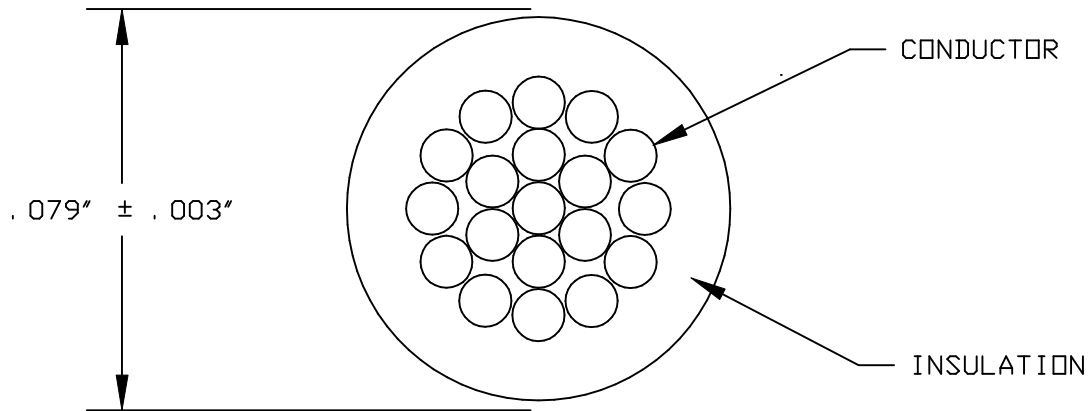

MATERIAL

CONDUCTOR: #18AWG 19/30 TINNED COPPER
 INSULATION: XLPE -.016" NOMINAL WALL
 DIAMETER: .079" NOMINAL

REQUIREMENTS

CONDUCTOR DCR: 7.06 OHMS/1000' MAX @ 20°C
 UL: STYLE 3266 125°C 300V
 CSA: AWM 125°C 300V
 MIL-W-16878/15: 125°C 1000V
 COLOR: GRAY
 WEIGHT: 8.21 LBS/1000 FT

GeneralCable PART NUMBER

682450.08

PRINT

"68A9377P18 125C 300V 18AWG 19STRD STYLE 3266 RJ
 AWM GENERAL CABLE BRAND REX BRAND (WC) XP181619-GE
 /CSA AWM IA 125C 300V FT1/MIL-W-16878/15 (1000V)"

REVISIONS	0	09/30/10	FIRST ISSUE

GeneralCable
 1600 West Main Street, Willimantic, CT 06226-1128
The Power of One

DRAWING NO: 12-1848

REFERENCES	IEWC/GE 68A9377P18GY19
	GeneralCable P/N 682450.08

DRAWN BY: CAD	APPROVED BY: M. LAJEUNESSE
THIS DRAWING IS THE PROPERTY OF GeneralCable AND SHALL NOT BE REPRODUCED, COPIED, OR USED AS BASIS FOR THE MANUFACTURE OR SALE OF THIS DESIGN WITHOUT THE PERMISSION OF GeneralCable	